

WHITMAN COUNTY PUBLIC WORKS SMALL WORKS WORKSHEET

PROJECT NAME: **Guardrail, Flared Terminals, Transitions and Posts.**

1. Sand Road #9060 Bridge @ m.p. 4.21
2. Sand Road #9060 Bridge @ m.p. 5.02

DESCRIPTION: Bridge @ 4.21 will be started in early June and complete in late July. Whitman County will install posts and Thrie Beam on Bridges. (Whitman County would like to pick up the Thrie Beam and posts when available). See Complete Detail Attachments.

All materials, equipment, labor and tax costs should be included in the quote. All contractors shall be bonded and must pay State Prevailing Wage Rate for labor except for fabrication. A contract bond will be required. (Please initial your acknowledgement of these requirements: _____).

All work must be completed by: **September 1st, 2016**

QUOTES MUST BE RETURNED BY: **June 9th, 2016 at 5:00 p.m.**

Contact: **Phil Meyer – Ext. 5203** **Phil.Meyer@co.whitman.wa.us**

Whitman County Public Works: (509) 397-4622 FAX (509) 397-6210.

(Anticipated award date: June 13th, 2016.)

BASIS OF AWARD: \$ _____

Tax \$ _____

Total: \$ _____

Company Name: _____

Signature: _____


Printed Name: _____

Address: _____


Phone: _____ FAX: _____

Email: _____


Bid Item	Unit	Location				Totals
		9060-04.21	Notes	9060-05.02	Notes	
Furnish Thrie Beam Guardrail Element Standard Plan C-1a	L.F.	112.5	8 Typical Rail Elements & 2 Half Sections	62.5	4 Typical Rail Elements & 2 Half Sections	175
Furnish W6x20x33" Galvanized Guardrail Post with Base Plate, Including Hardware	Each	20	Must Include all hardware for attachment to the structure and attaching Thrie Beam Guardrail Elements			20
Furnish & Install Beam Guardrail Type 1A Standard Plans C-1 & C-2p Case 22-AC	L.F.	12.5	1 Typical Rail Element @ 8.25' Rad.			12.5
Furnish & Install Beam Guardrail Anchor Type 1 Standard Plans C-6 & C-2p Case 22-AC	Each	1				1
Furnish & Install Beam Guardrail Transition Section Type 12 Standard Plans C-3b	Each	4				4
Furnish & Install Beam Guardrail Transition Section Type 6 Standard Plans C-2h & C-3a	Each			3	For Service Level 1 Weak Post Bridge Rail System.	3
Furnish & Install Thrie Beam Reducer Section Type B Standard Plans C-1d & C-2h	Each			4	For Service Level 1 Weak Post Bridge Rail System.	4
Furnish & Install 50' Beam Guardrail Non-Flared Terminals Standard Plan C-4e	Each	3		3		6
Furnish & Install 25' Fleet TL2 Beam Guardrail Flared Terminals Standard Plan C-4b	Each			1	No Transition, Directly Attached to Reducer Section Type B	1

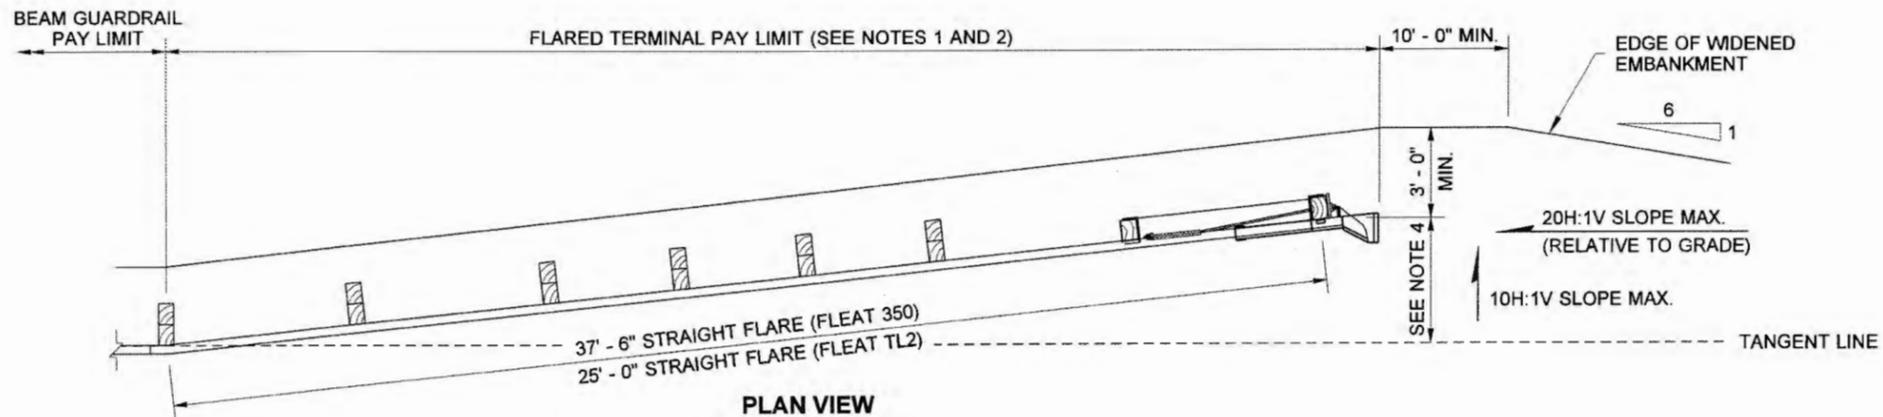


PLAN VIEW

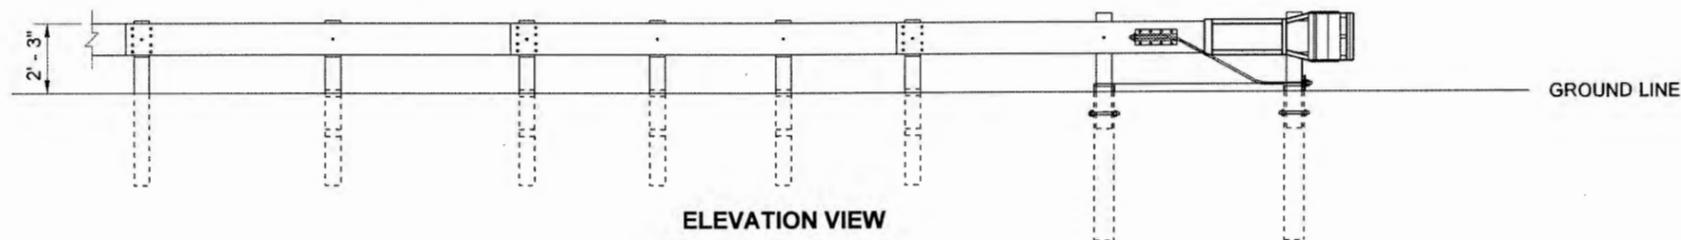

ELEVATION VIEW
FLEAT OPTION

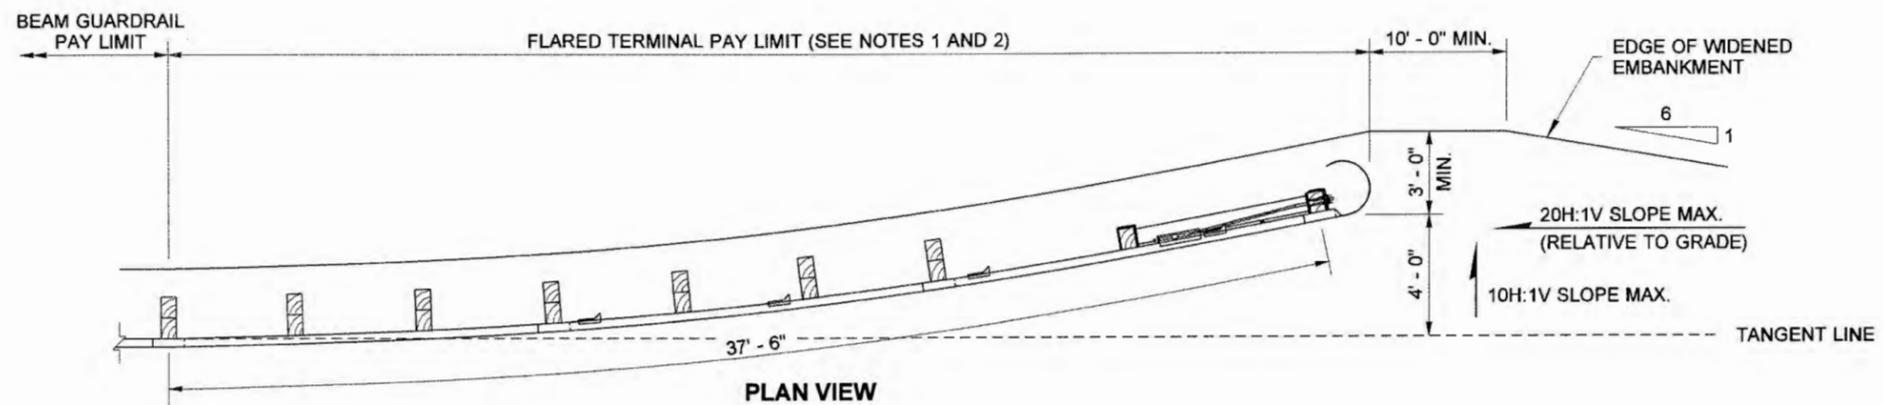

PLAN VIEW

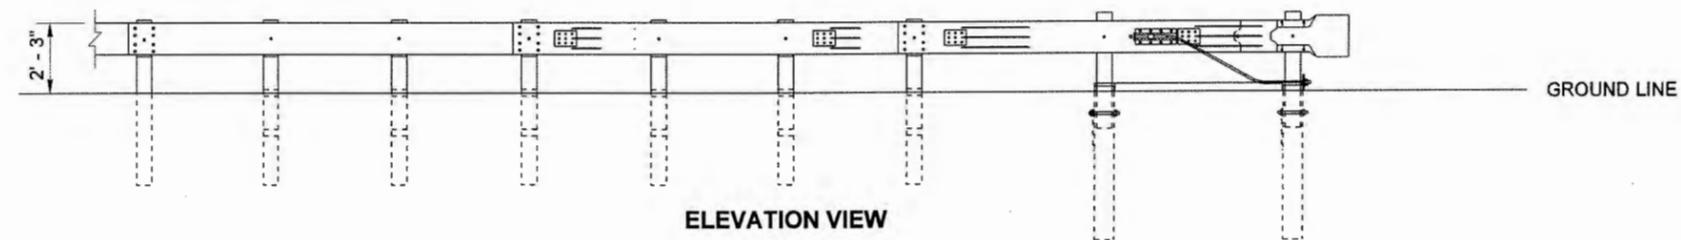

ELEVATION VIEW
SRT OPTION

NOTES

1. Unless otherwise indicated in the contract, the SRT - 350 (12.5, 8 Post) as manufactured by Trinity Industries, Inc., or a FLEAT 350 as manufactured by Road Systems Inc., shall be installed per manufacturer's recommendations. If specified in the Contract, the FLEAT TL2 as manufactured by Road Systems, Inc. shall be installed per manufacturer's recommendations.
2. Where terminal is placed on a curve, and post offsets would result in the rail encroaching onto the shoulder (e.g., the inside of a curve), the posts shall be installed so that the face of the rail is at the edge of the shoulder.
3. When snow load post washers and snow load rail washers are called for in the contract, the snow load rail washers must be omitted within the terminal limits.
4. Offset distances:
 FLEAT 350 4' - 0"
 FLEAT TL2 1' - 8" minimum




EXPIRES JULY 24, 2006

**BEAM GUARDRAIL
FLARED TERMINAL
STANDARD PLAN C-4b**

SHEET 1 OF 1 SHEET


APPROVED FOR PUBLICATION
David Peterson 6.8.06
 STATE DESIGN ENGINEER DATE

04/2006	Revised FLEAT Flare Lengths	AMC
DATE	REVISION	BY




NOTES

1. An SKT-350 as manufactured by Road Systems, Inc. shall be installed according to manufacturer's recommendations. When a TL2 terminal is specified in the Contract an SKT-TL2 as manufactured by Road Systems, Inc. shall be installed according to the manufacturer's recommendations.
2. A reflectorized object marker shall be installed according to manufacturer's recommendations.
3. When snow load post washers and snow load rail washers are required by the Contract, the snow load rail washers must not be installed within the terminal limits.
4. Terminal shall be installed at a taper, ensuring that end piece is entirely off shoulder.
5. Length for SKT-350 is 50' (ft). Length for SKT-TL2 is 25' (ft).

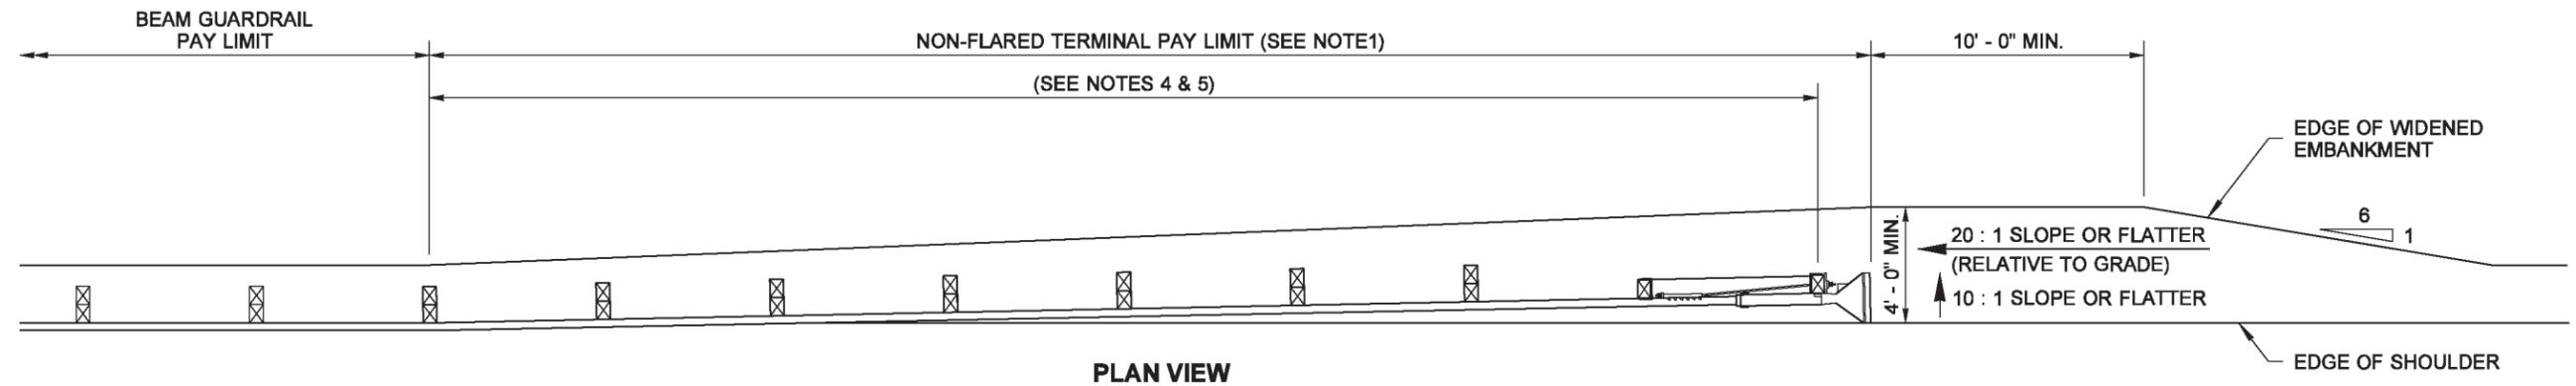

PLAN VIEW

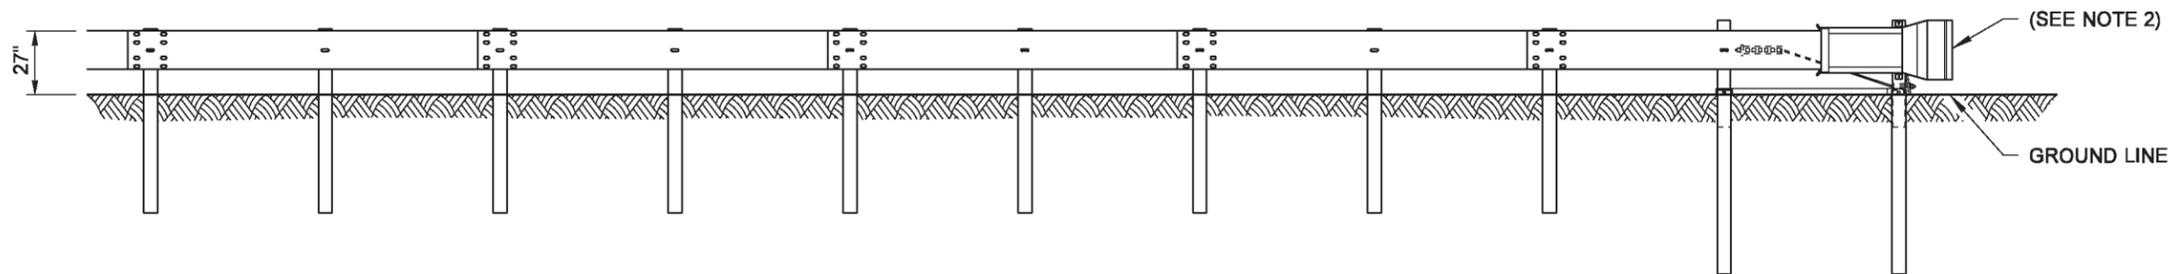

ELEVATION VIEW



Barry, Ed
Oct 23 2014 11:31 AM





**BEAM GUARDRAIL
NON-FLARED TERMINAL
STANDARD PLAN C-4e**

SHEET 1 OF 1 SHEET

APPROVED FOR PUBLICATION
Bakotich, Pasco
Oct 23 2014 12:09 PM
STATE DESIGN ENGINEER
Washington State Department of Transportation

10/2014	REMOVED TRINITY NON-FLARED TERMINAL	CF
DATE	REVISION	BY

DRAWN BY: MARK SUJKA

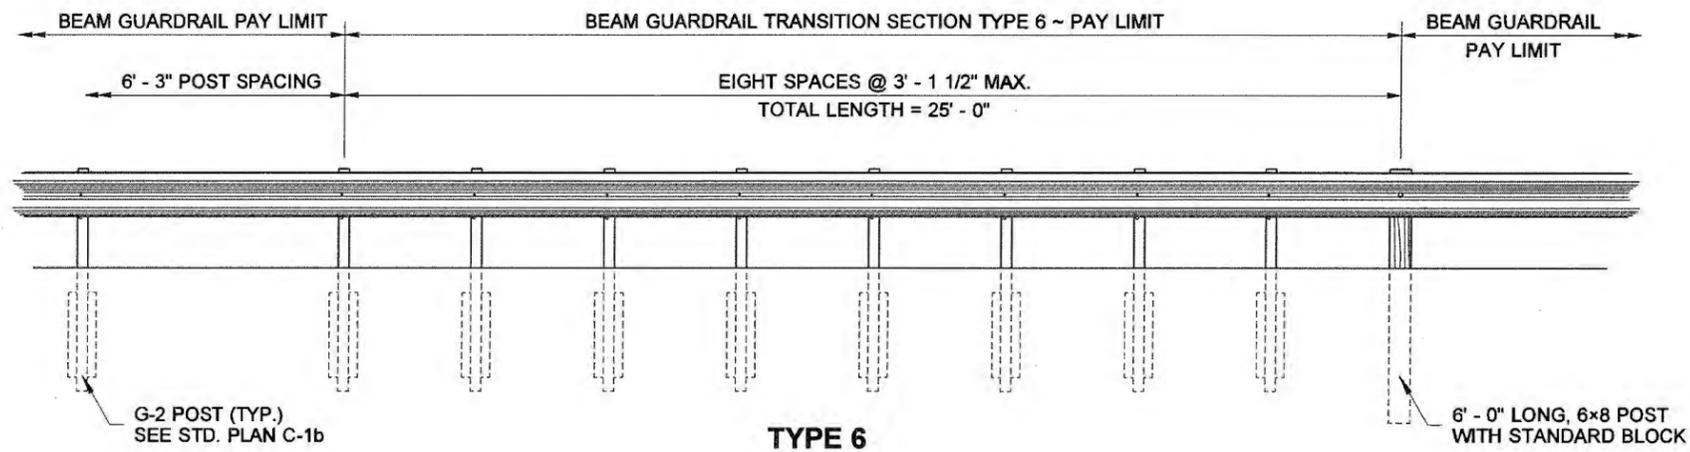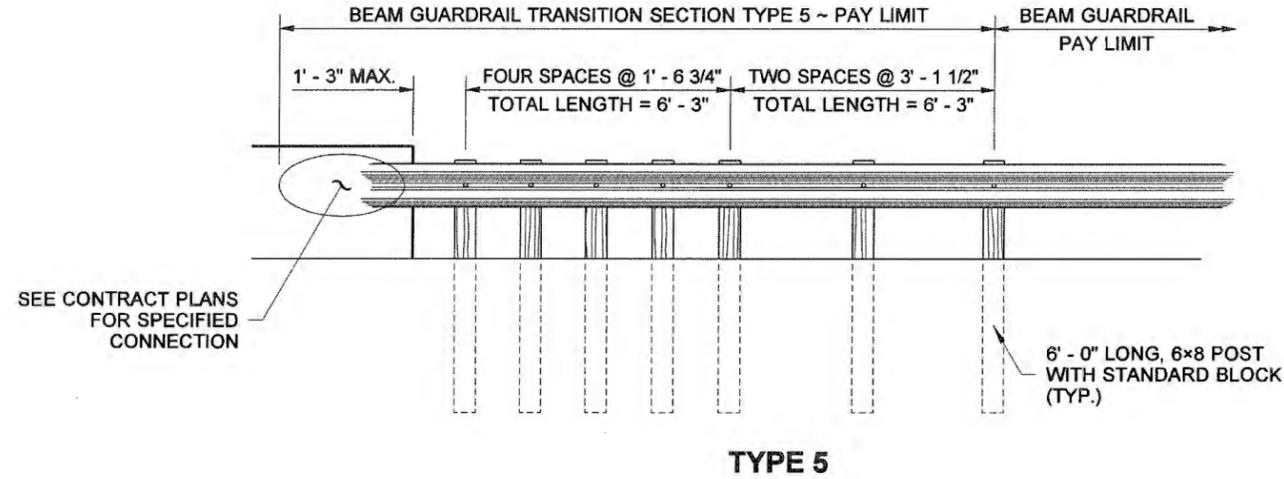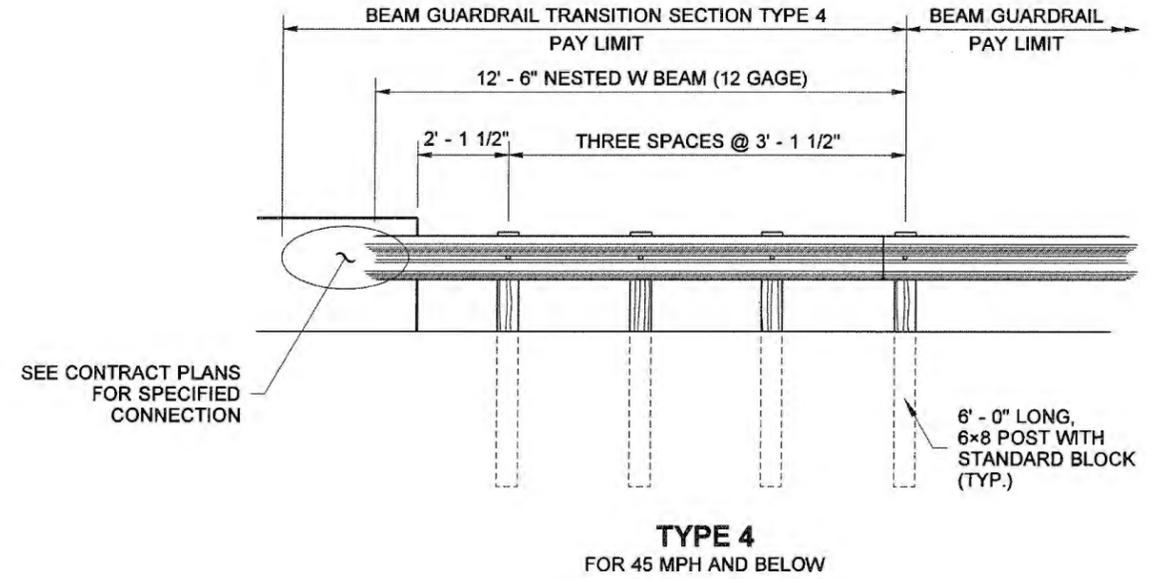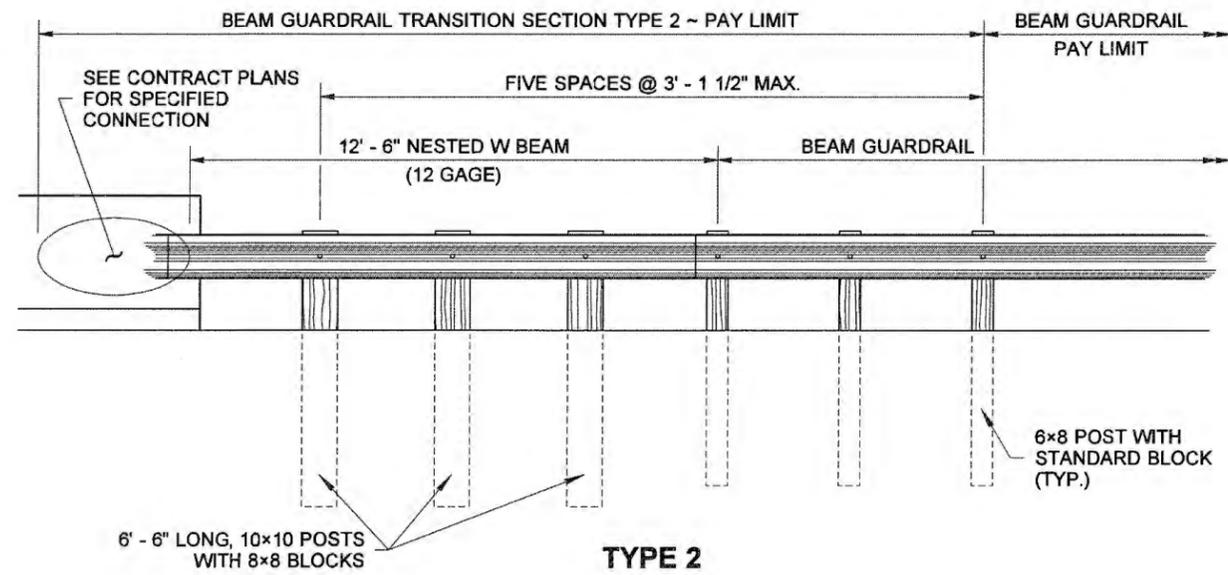


EXPIRES JULY 24, 2006

**BEAM GUARDRAIL
TRANSITION SECTIONS
STANDARD PLAN C-3a**


SHEET 1 OF 1 SHEET

APPROVED FOR PUBLICATION
Harold Peterson 10.4.05
STATE DESIGN ENGINEER DATE
Washington State Department of Transportation


DRAWN BY: FERN LIDDELL

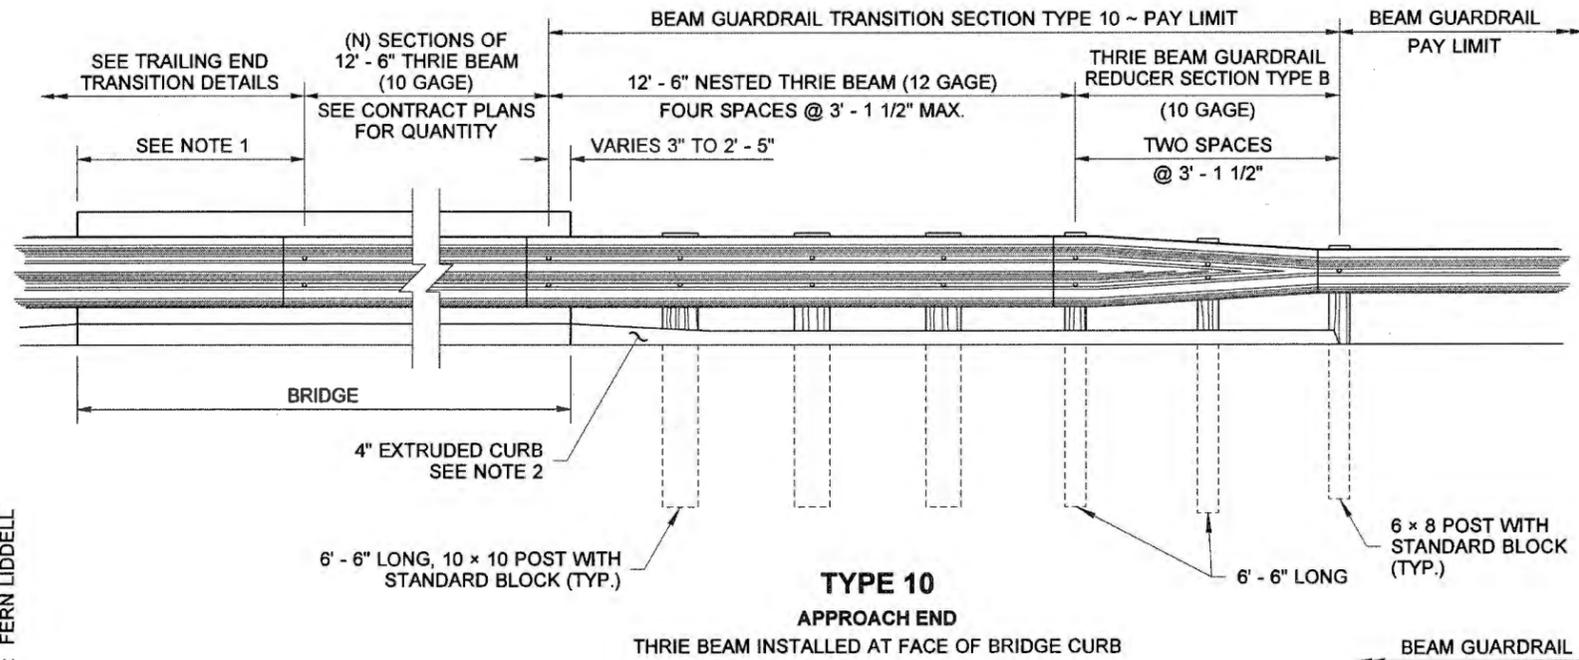

TYPE 10
APPROACH END
 THRIE BEAM INSTALLED AT FACE OF BRIDGE CURB

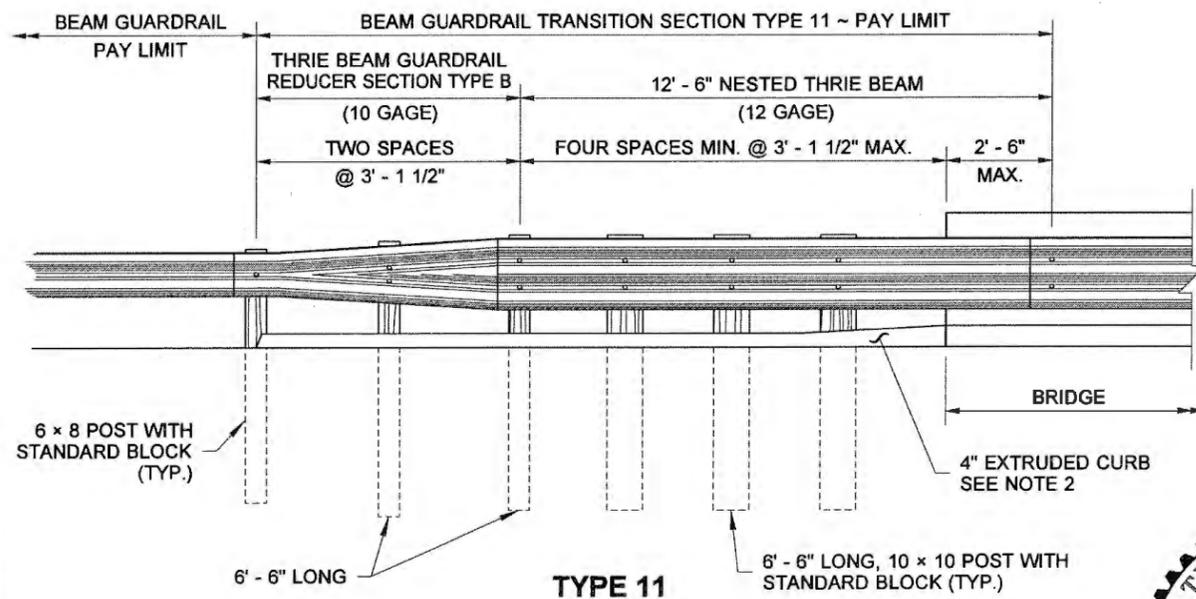

TYPE 11
TRAILING END
 THRIE BEAM INSTALLED AT FACE OF BRIDGE CURB

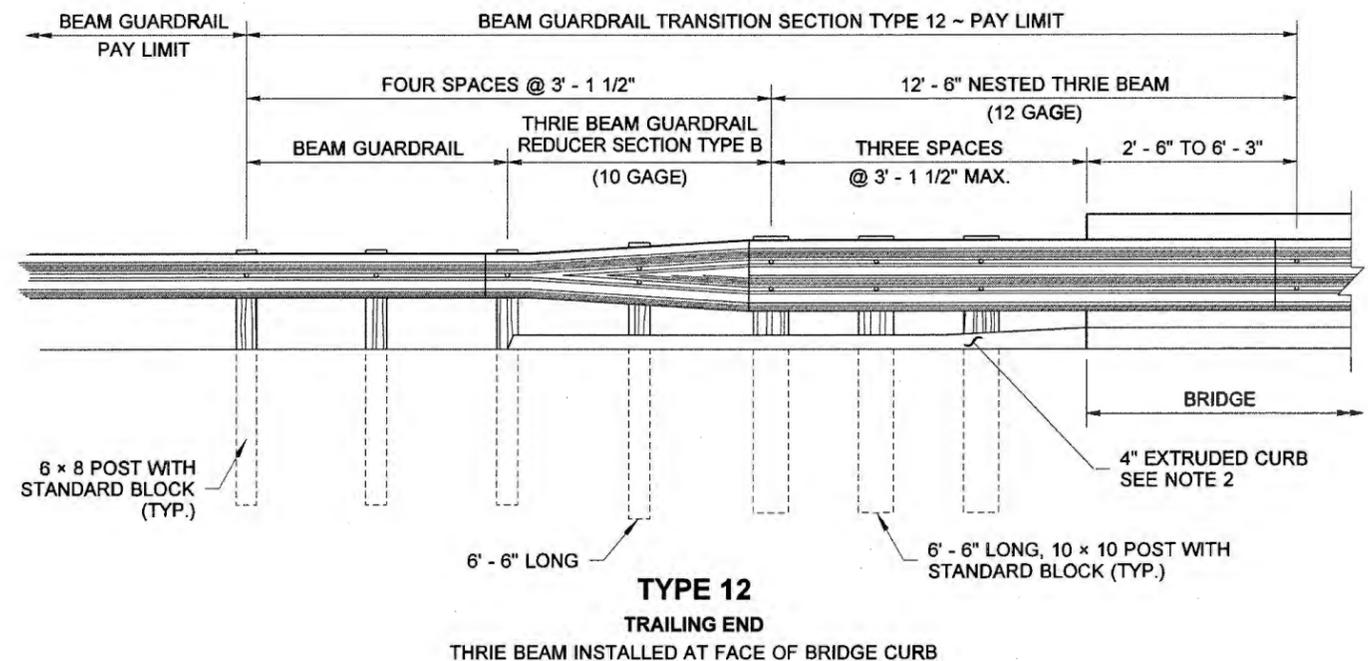

TYPE 12
TRAILING END
 THRIE BEAM INSTALLED AT FACE OF BRIDGE CURB

NOTES

1. If the distance from the end of the bridge to the end of the thrie beam bridge rail section exceeds 6' - 3" using 12' - 6" thrie beam sections, add a 6' - 3" section of thrie beam bridge rail to reduce the length to less than 6' - 3".
2. When thrie beam is installed at the face of the bridge curb, install Extruded Curb at face of Guardrail. See **Standard Plan F-10.40** for details. Match the height of existing bridge curb with a 20H : 1V transition.
3. When thrie beam is installed at the face of rigid bridge rail, an HMA ramp is required from the roadway surface to the top of the bridge curb or sidewalk. The slope of the ramp shall be 20H : 1V or flatter.



6-17-2011


**BEAM GUARDRAIL
 TRANSITION SECTIONS
 STANDARD PLAN C-3b**

SHEET 1 OF 2 SHEETS

APPROVED FOR PUBLICATION

Peter B. [Signature] 6/22/11
 STATE DESIGN ENGINEER DATE


Washington State Department of Transportation

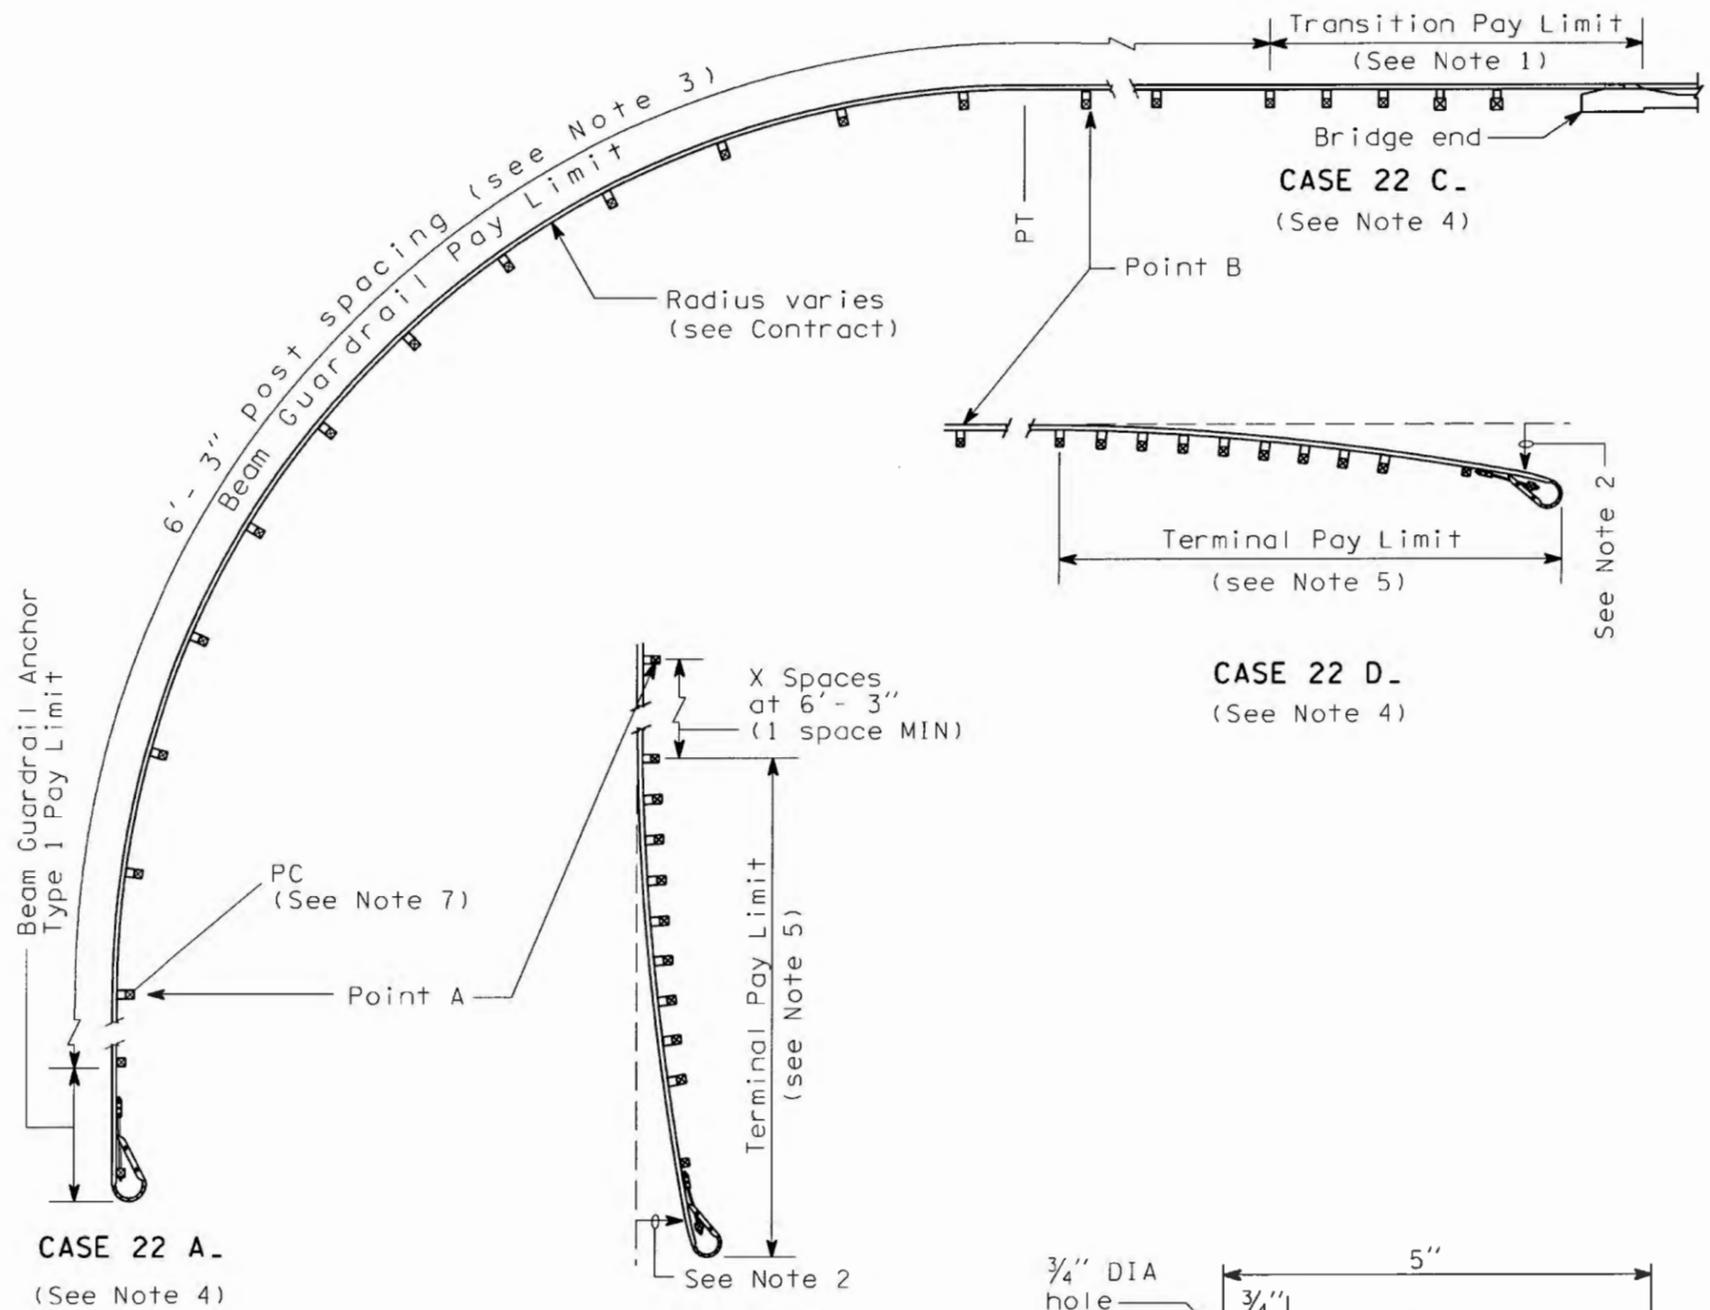


CASE 22 A.
(See Note 4)

CASE 22 B.
(See Note 4)

CASE 22 D.
(See Note 4)

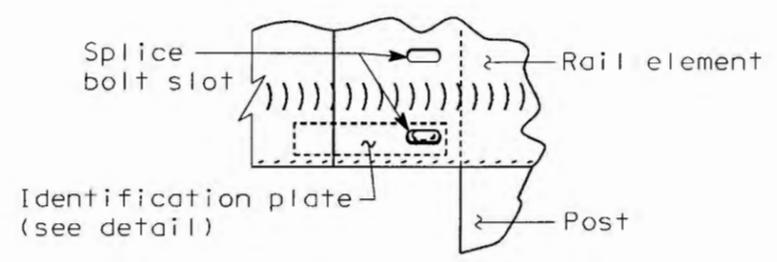

IDENTIFICATION PLATE MOUNTING DETAIL
(See Note 7)

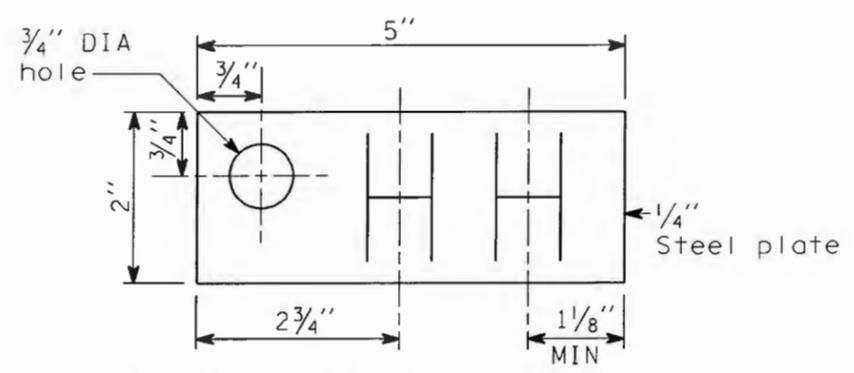

IDENTIFICATION PLATE DETAIL
(See Note 6)

NOTES

1. See Contract for transition and connection type.
2. The slope from the edge of the shoulder into the face of the guardrail should not be steeper than 10:1.
3. Guardrail installation shall be Beam Guardrail Type 1 with standard post and block.
4. First letter of case designation indicates end treatment on side road. Second letter indicates end treatment on main road. For instance a terminal on the side road and a bridge connection on the main road would be Case 22 BC.
5. For terminal type and details, see Contract and applicable Standard Plan(s).
6. Radius dimensions shall be etched into plate replacing the letters "HH" shown on the Identification Plate Detail. Digits shall be 1/2" MIN height and 3/4" MAX width. Plate shall be galvanized after etching.
7. The guardrail Identification Plate shall be mounted at the lower splice bolt on the back side of the rail element at the PC of the guardrail radius.



**GUARDRAIL PLACEMENT
STRONG POST
INTERSECTION DESIGN
STANDARD PLAN C-2p**


SHEET 1 OF 1 SHEET

APPROVED FOR PUBLICATION
David Peterson 10.31.03
STATE DESIGN ENGINEER DATE
Washington State Department of Transportation

09/2003	CORRECTED REFERENCES TO NOTES.	MHG
DATE	REVISION	BY

NOTES

1. For Service Level 1, Weak Post Bridge Rail System, see Contract.
2. SRT Terminal shown. For Terminal type and details, see Contract and applicable Standard Plan(s).
3. The slope from the edge of the shoulder into the face of the guardrail should not be steeper than 10:1.
4. See Standard Plan "Beam Guardrail Posts and Blocks".

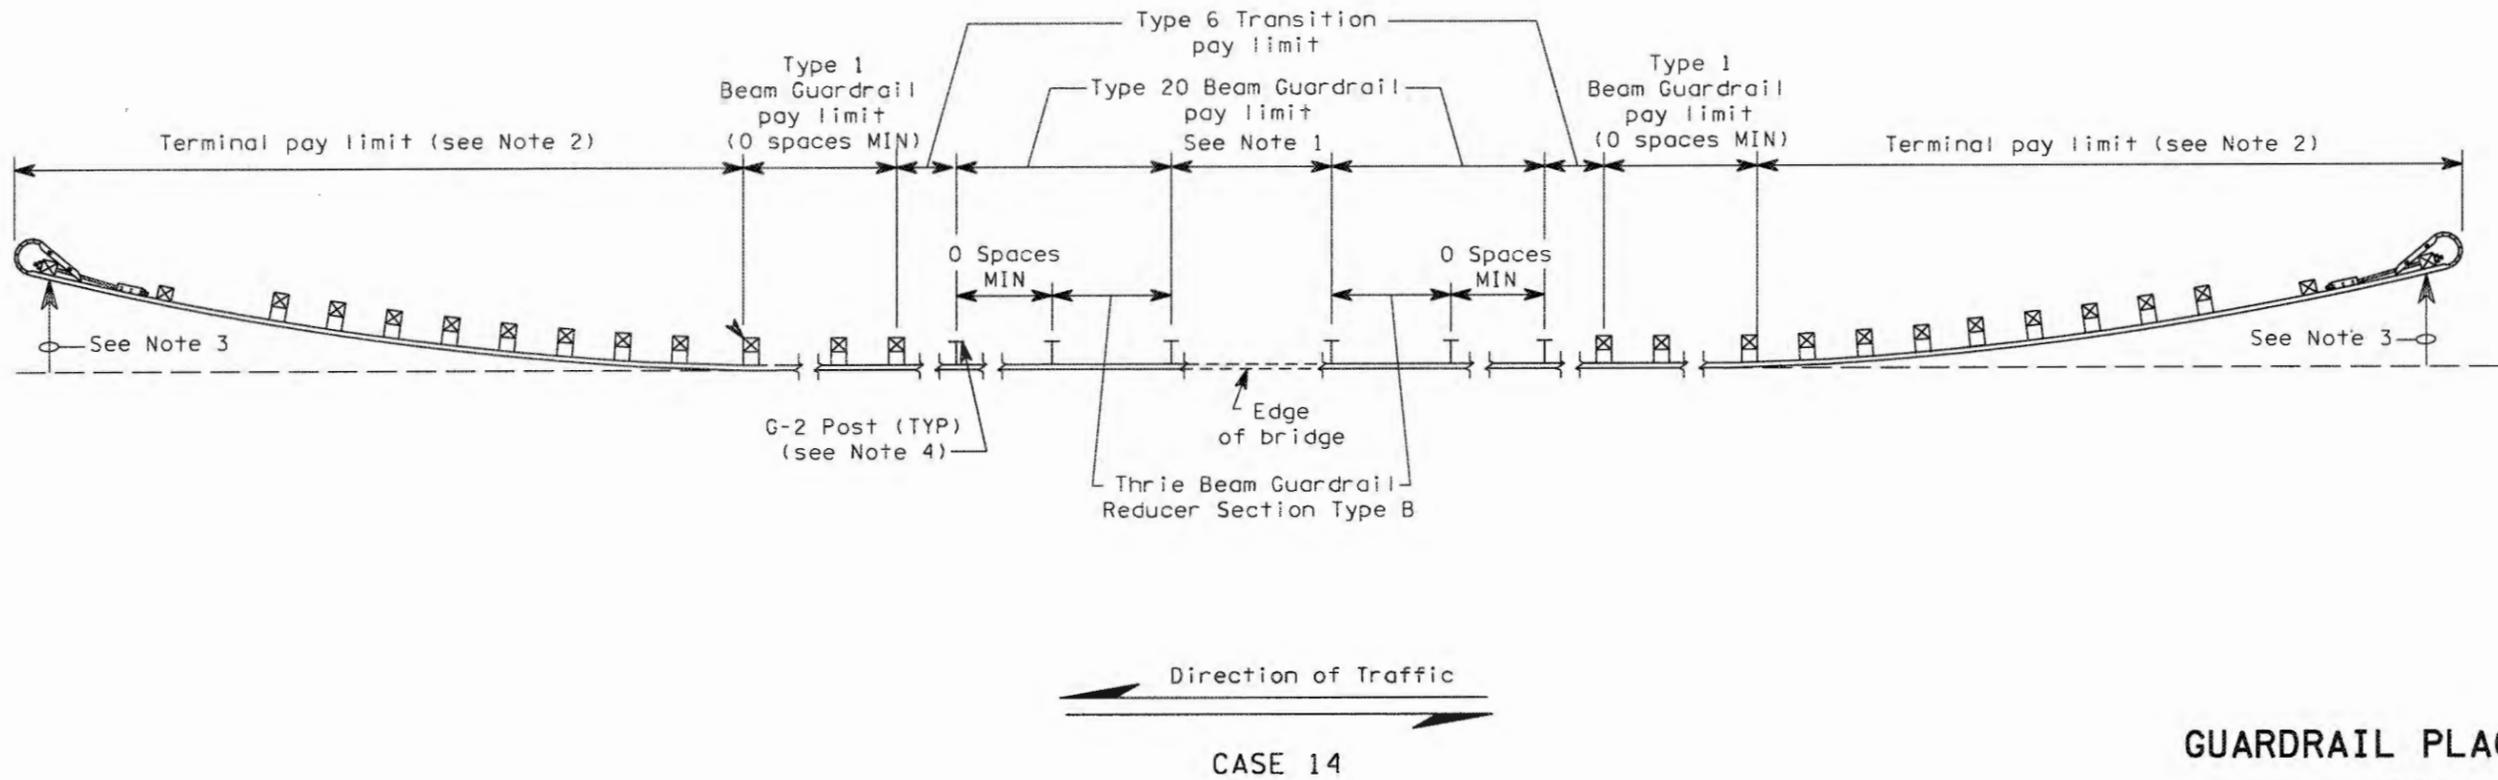

GUARDRAIL PLACEMENT






STANDARD PLAN C-2h

APPROVED FOR PUBLICATION






[Signature] 3/28/97
 STATE DESIGN ENGINEER DATE

WASHINGTON STATE DEPARTMENT OF TRANSPORTATION
 OLYMPIA, WASHINGTON

DRAWN BY: FERN LIDDELL

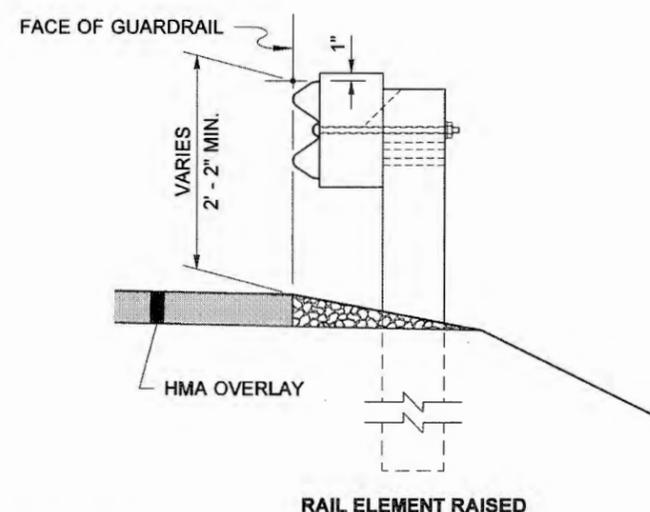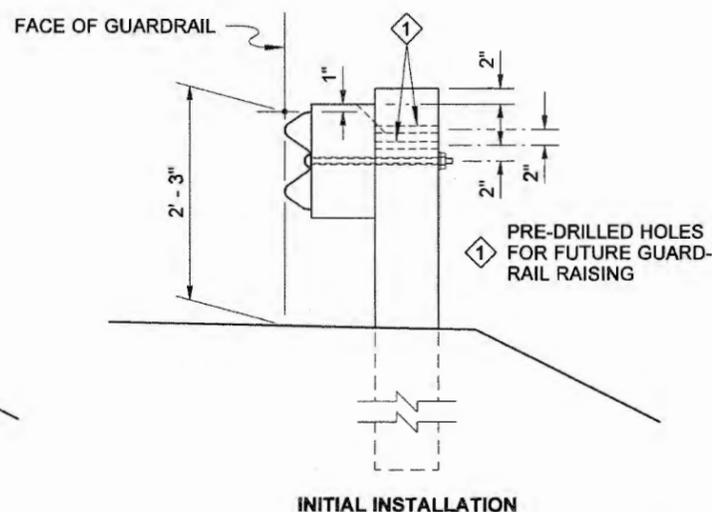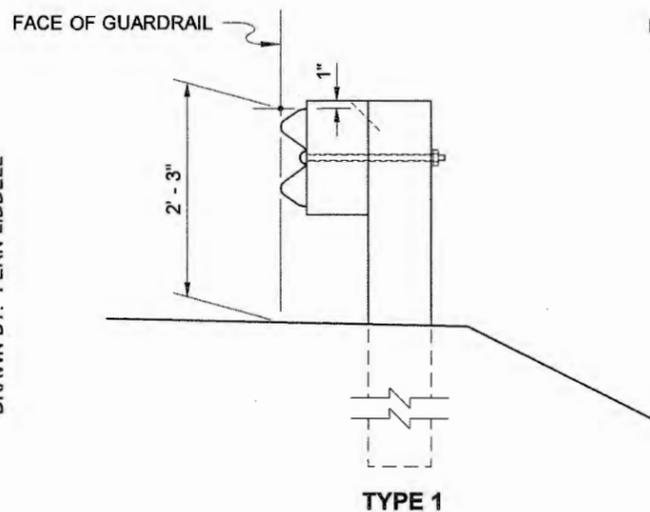

TYPE 1 ALTERNATIVE

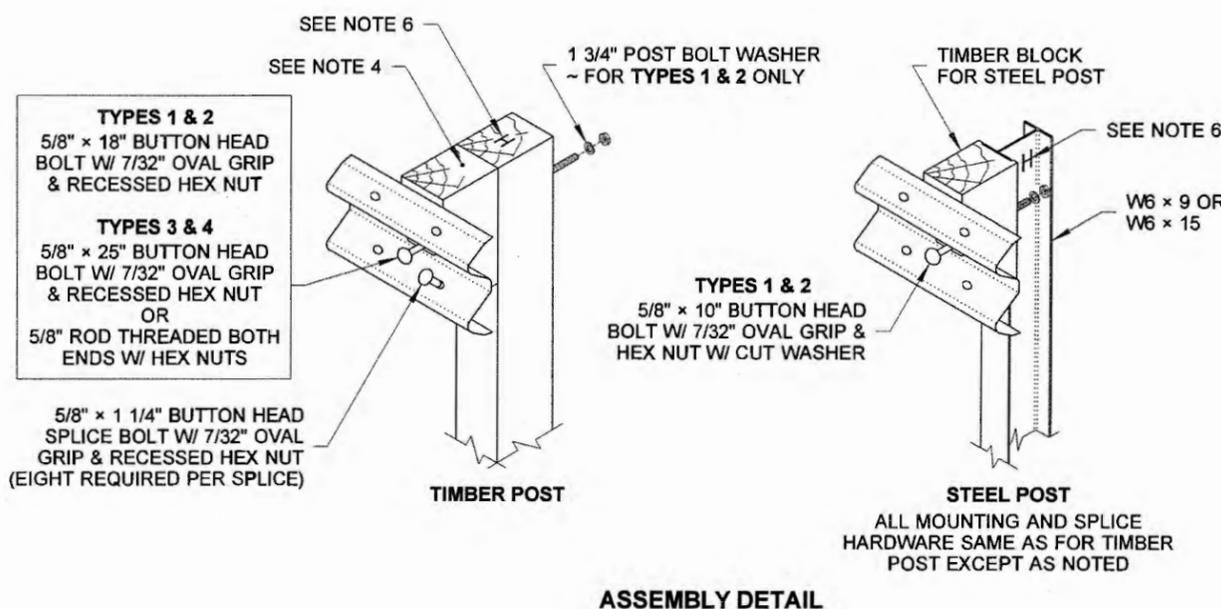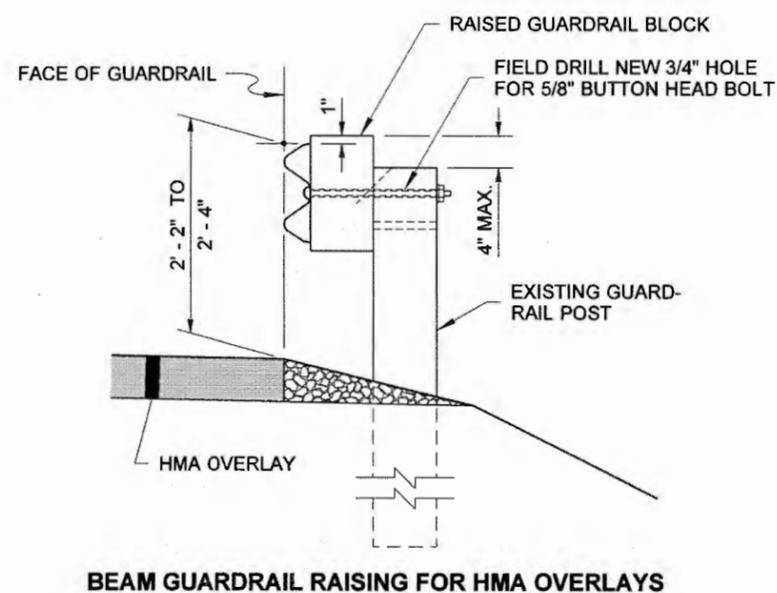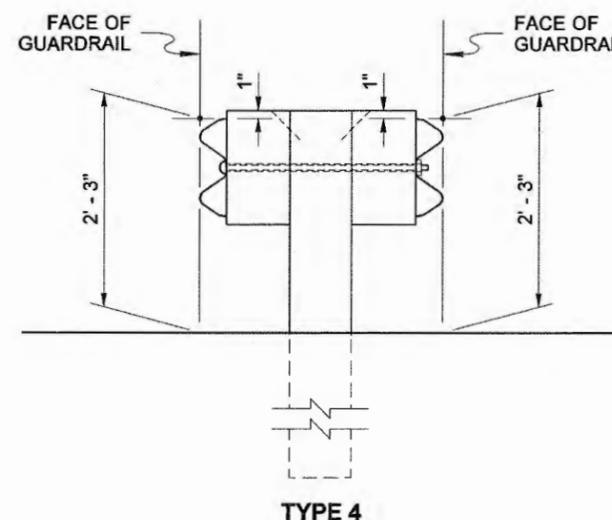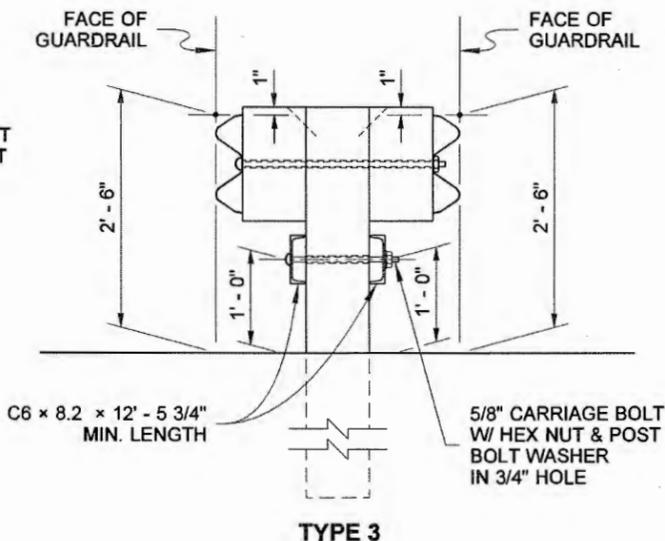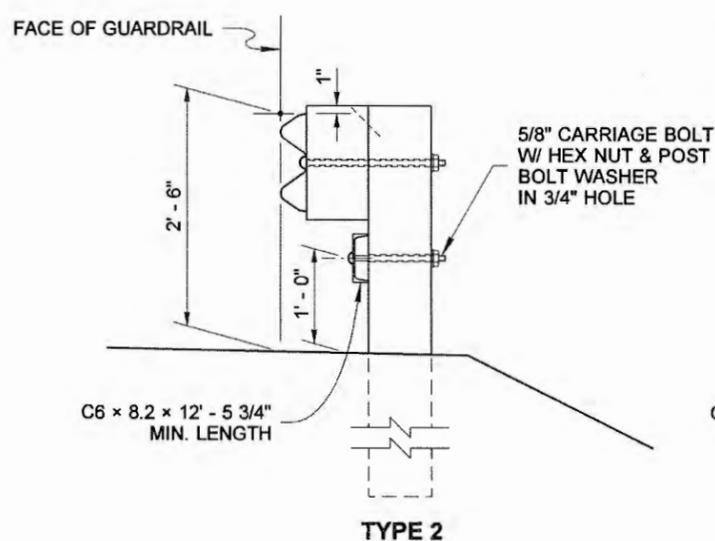

NOTES

- When required by the Contract, a Snow Load Post Washer shall be used on the backside of the post (in lieu of the 1 3/4" Post Bolt Washer) and a Snow Load Rail Washer shall be placed on the face side of Beam Guardrail Types 1 and 2. Snow Load Rail Washers shall not be installed on terminals.
- Rail Washers, also called "Snow Load Rail Washers" are not required on new installation except as called for in Note 1. Unnecessary Rail washers need not be removed from existing installations, except those on posts 2 through 8 of a BCT installation shall be removed.
- Beam Guardrail post spacing for Types 1 through 4 shall be 6' - 3" on centers.
- Timber blocks shall be toe-nailed to the post with a 16d galvanized nail to prevent block rotation.
- For post and block details, see **Standard Plan C-1b**.
- When "Beam Guardrail Type - ___ Ft. Long Post" is specified in the Contract, the post length shall be stamped with numbers, 1 1/2" min. high and 3/4" wide at the location where the letter "H" is shown in the ASSEMBLY DETAIL. For wood post applications, the letter shall be stamped to a minimum depth of 1/4". For steel post applications, the letter shall be legible after the post is galvanized. After post installation, it shall be the Contractor's responsibility to ensure that the stamped numbers remain visible.
- Existing posts shall not be raised. Replace posts as necessary to achieve required guardrail height.



6-8-2011

**BEAM GUARDRAIL
TYPES 1 ~ 4
(W-BEAM)
STANDARD PLAN C-1**

SHEET 1 OF 2 SHEETS


APPROVED FOR PUBLICATION

Peter B... 6/16/11


STATE DESIGN ENGINEER DATE

Washington State Department of Transportation



DRAWN BY: FERN LIDDELL

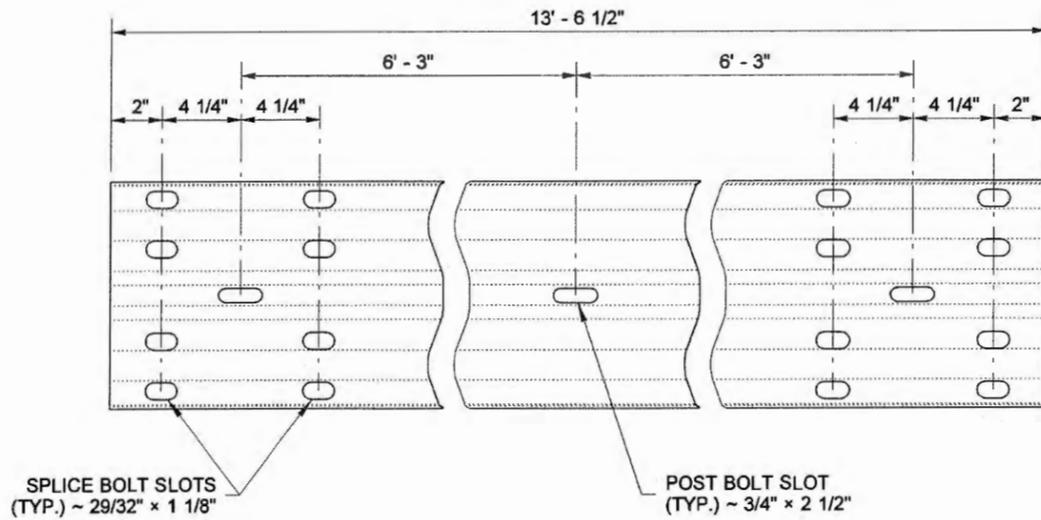


TYPICAL RAIL ELEMENT

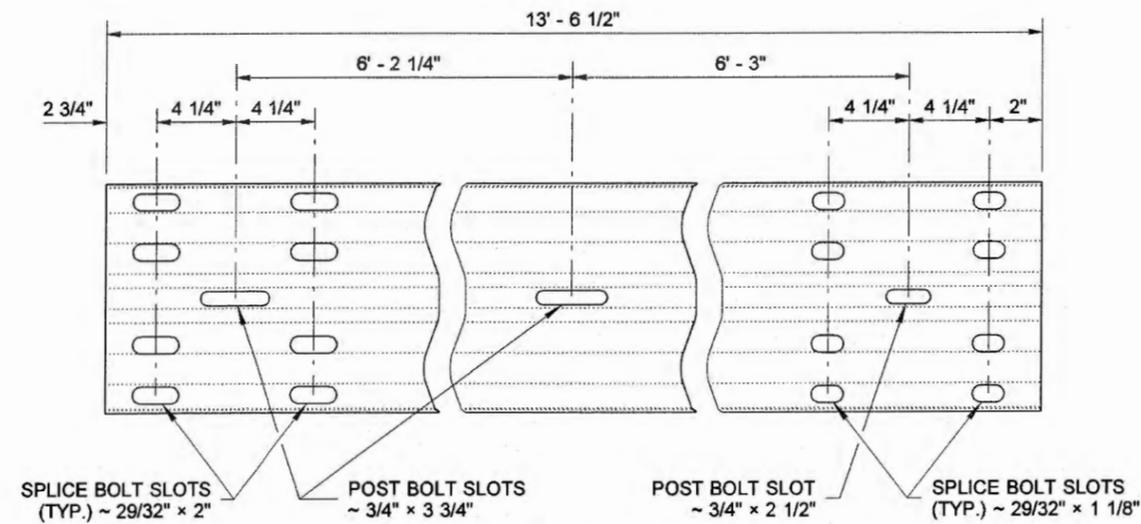


EXPANSION SECTION

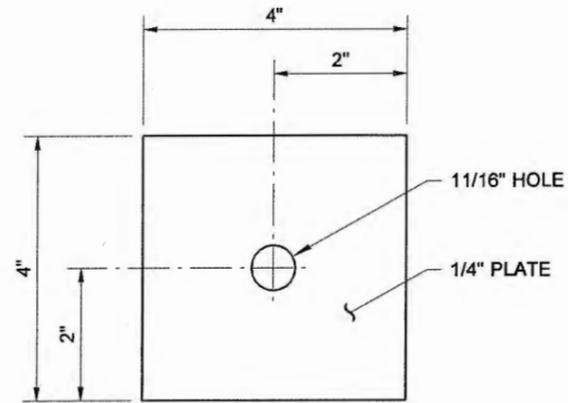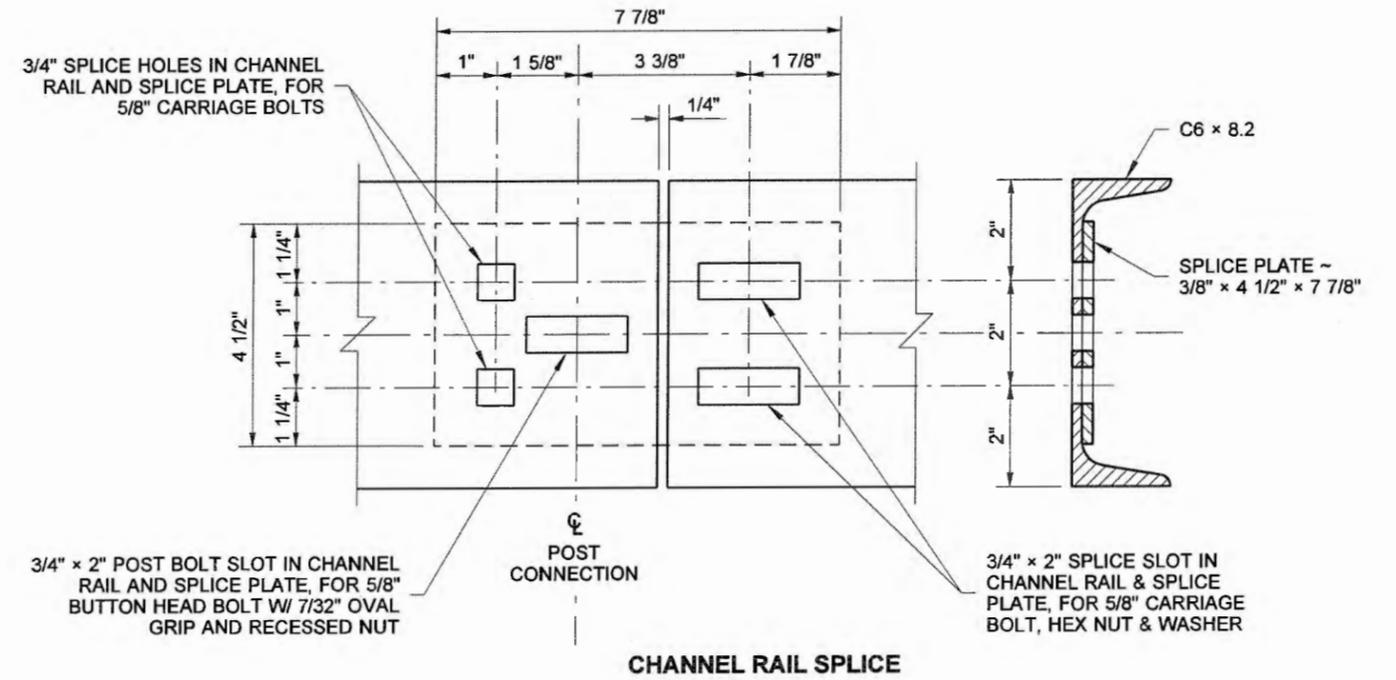

SNOW LOAD POST WASHER
SEE NOTE 1

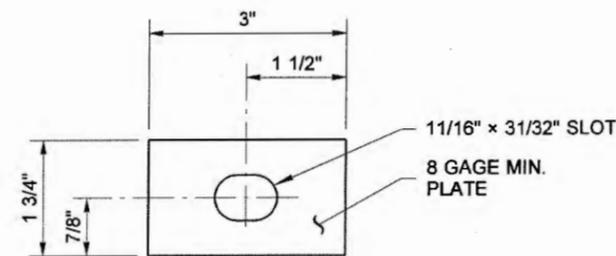

SNOW LOAD RAIL WASHER
SEE NOTES 1 & 2

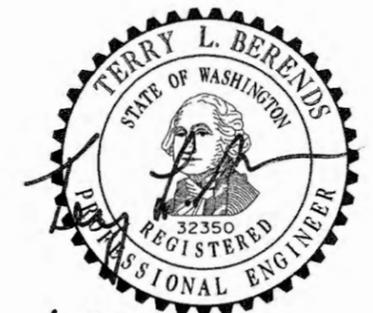

6-8-2011

**BEAM GUARDRAIL
TYPES 1 ~ 4
(W-BEAM)
STANDARD PLAN C-1**


SHEET 2 OF 2 SHEETS

APPROVED FOR PUBLICATION


Terry L. Berends 6/8/11
STATE DESIGN ENGINEER DATE

Washington State Department of Transportation


DRAWN BY: FERN LIDDELL

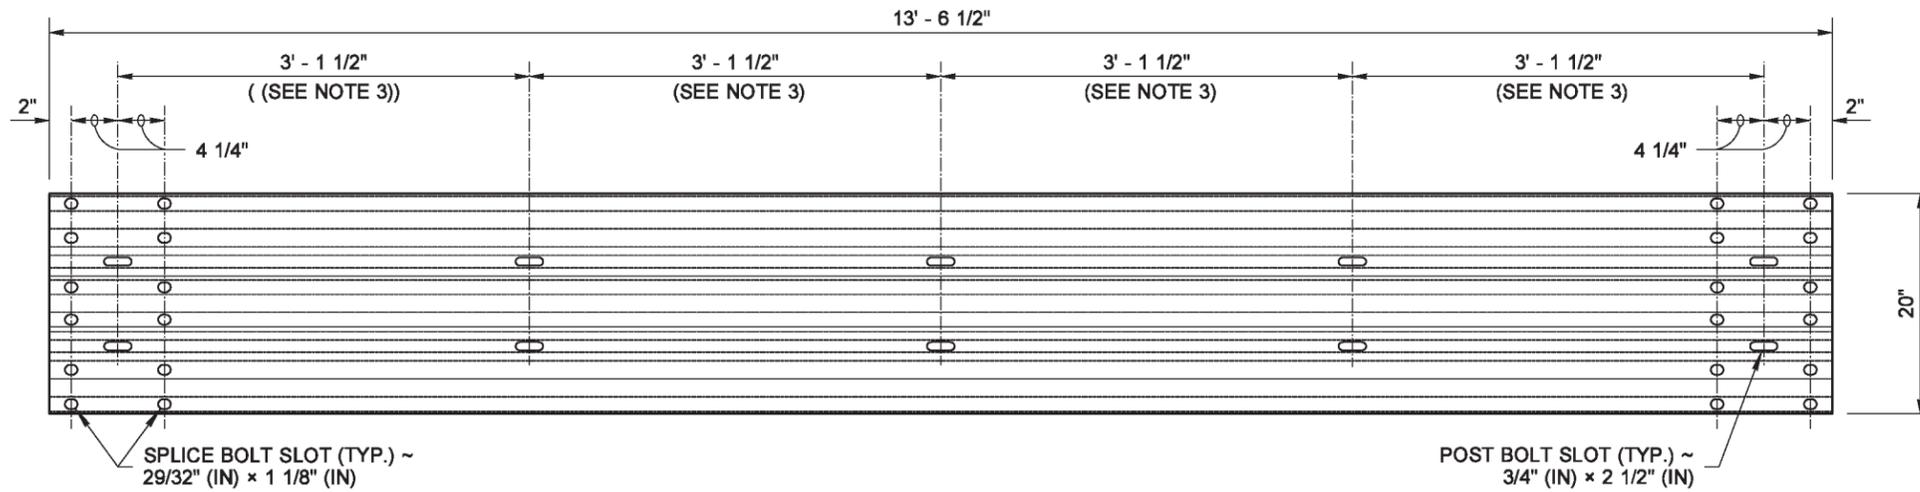


TYPICAL RAIL ELEMENT

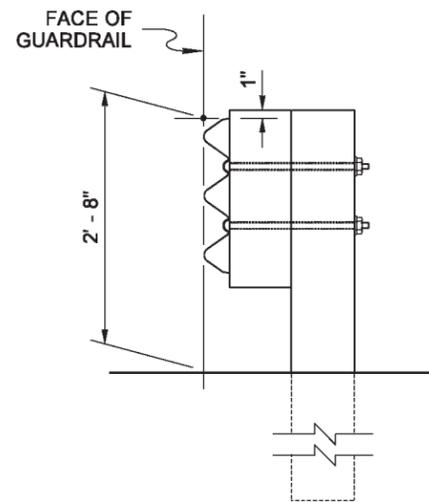


RAIL ASSEMBLY

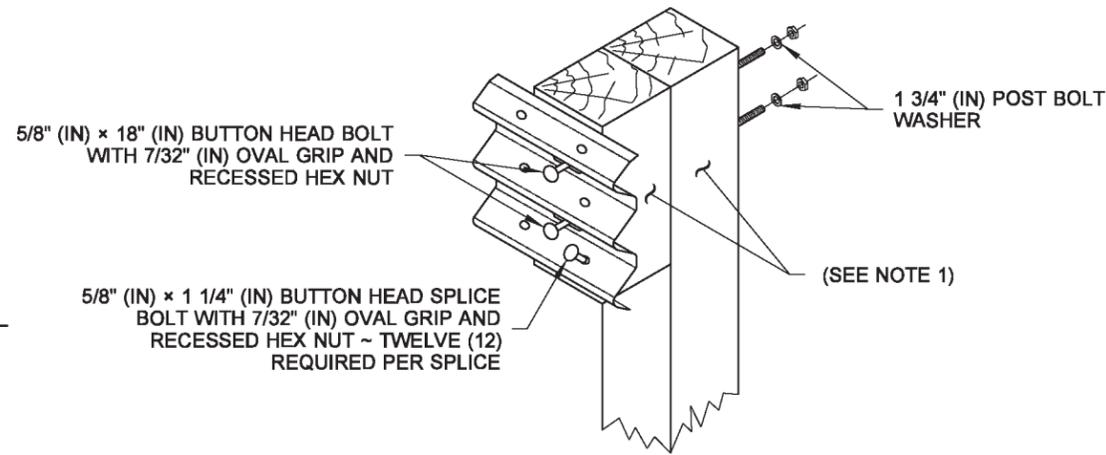



WOOD POST ASSEMBLY

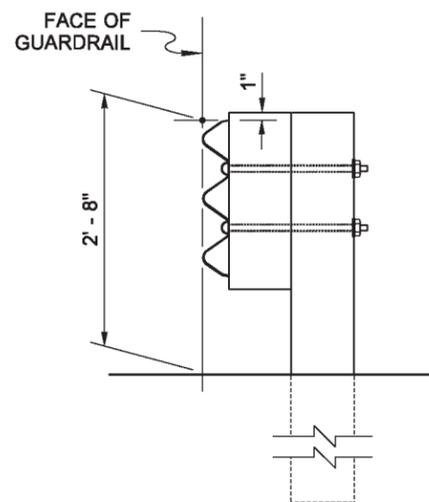

RAIL ASSEMBLY

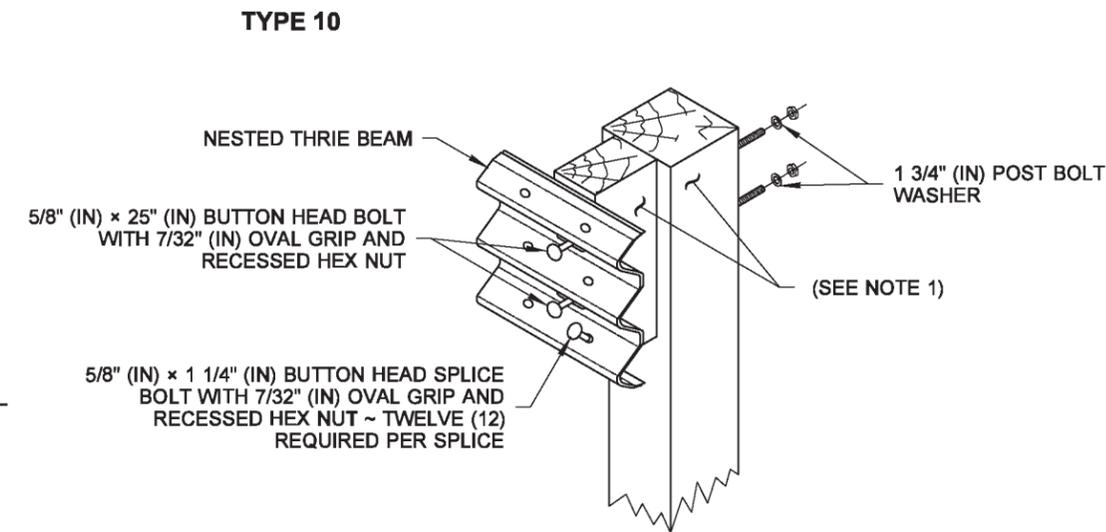

WOOD POST ASSEMBLY

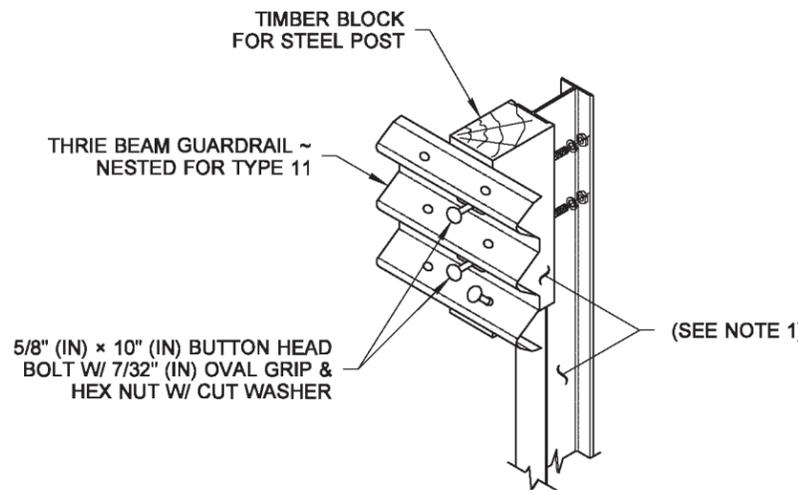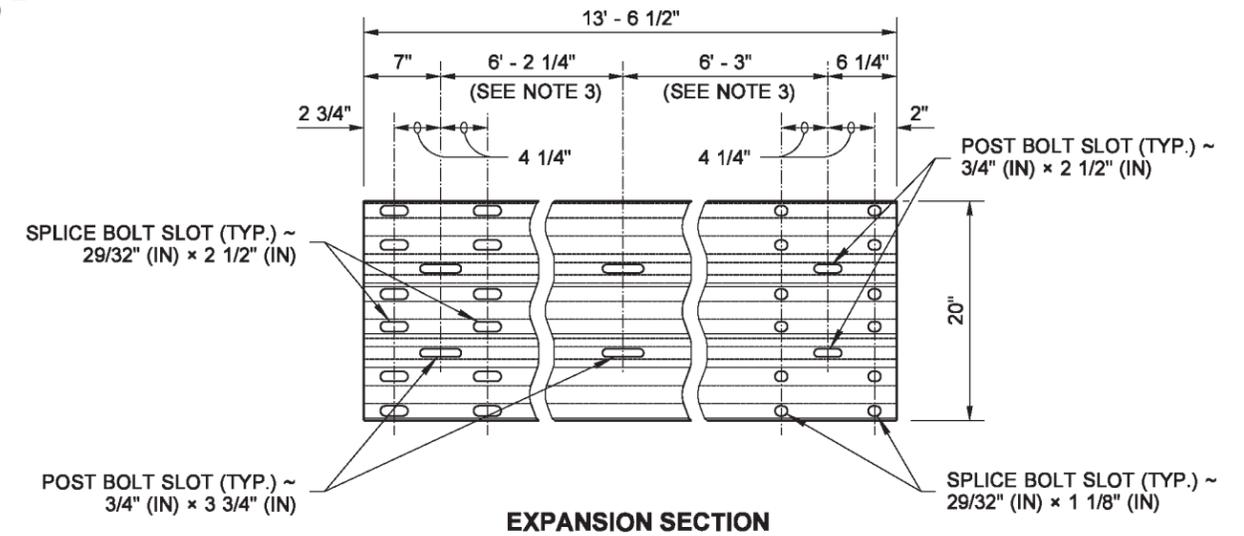

STEEL POST ASSEMBLY

NOTES

1. Type 10 post shall be 6 x 8 timber, OR either W6 x 9, or W6 x 8.5 steel. Type 11 post shall be 10 x 10 timber or W6 x 15. For additional details see **Standard Plan C-1b**.
2. Type 10 guardrail post spacing shall be 6' - 3" on center. Type 11 shall be a maximum of 3' - 1 1/2" on center.
3. Spacing may vary depending on application. See **Standard Specification Section 9-16.3(1)** for rail element requirements.



Barry, Ed
Jul 14 2015 7:07 AM

BEAM GUARDRAIL (THRIE BEAM)

STANDARD PLAN C-1a

SHEET 1 OF 1 SHEET

APPROVED FOR PUBLICATION


Carpenter, Jeff

Jul 14 2015 11:30 AM


STATE DESIGN ENGINEER




Washington State Department of Transportation

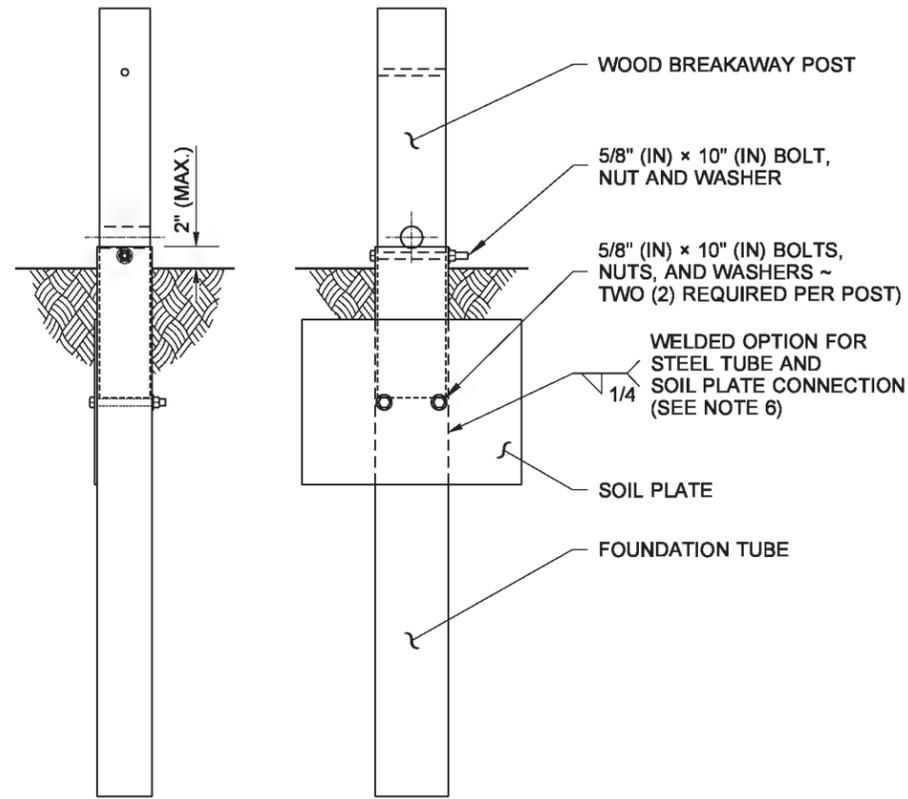


FRONT VIEW SIDE VIEW
ANCHOR POST ASSEMBLY

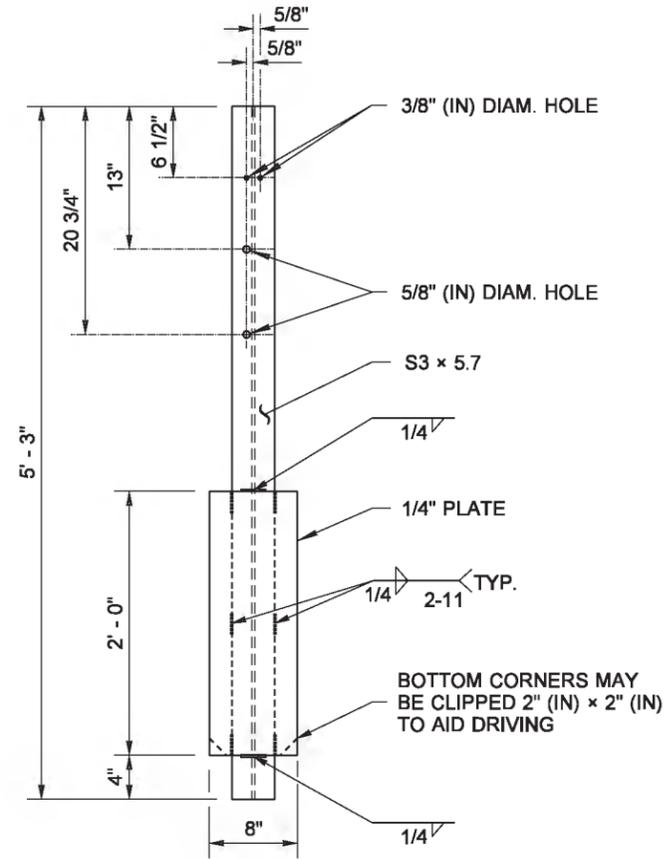

G-2 POST

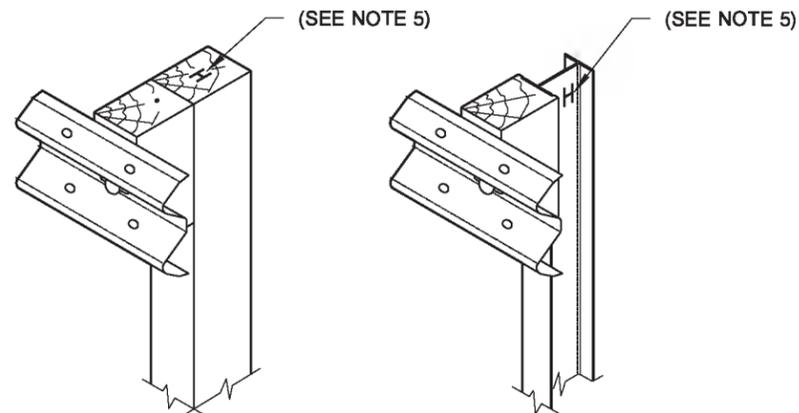

TIMBER POST STEEL POST
PARTIAL ASSEMBLY DETAIL

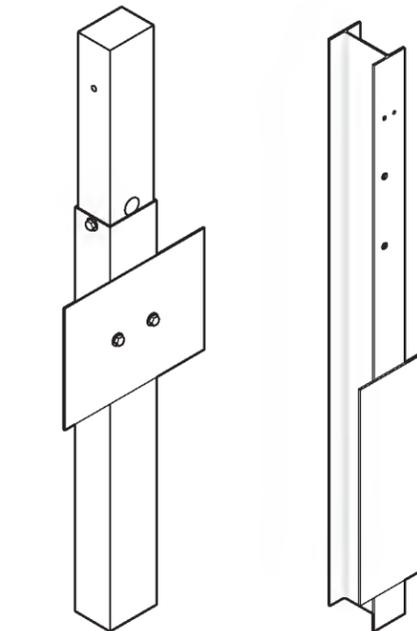

ANCHOR POST G-2 POST
ISOMETRIC

NOTES

1. Wood posts for all guardrail placement plans shall be 6 x 8 except where noted otherwise.
2. Lower hole is for Rub Rail of Type 2 and Type 3 Beam Guardrail.
3. W6x8.5 or W6x9 steel posts and timber blocks are alternates for 6x8 timber posts and blocks. W6x15 steel posts and timber blocks are alternates for 10x10 timber posts and blocks.
4. Holes shall be located on approaching traffic side of web.
5. When "Beam Guardrail Type - __ Ft. Long Post" is specified in the Contract, the post length shall be stamped with numbers, 1 1/2 (in) min. high and 3/4 (in) wide at the location where the letter "H" is shown in the ASSEMBLY DETAIL. For wood post applications, the letter shall be stamped to a minimum depth of 1/4 (in). For steel post applications, the letter shall be legible after the post is galvanized. After post installation, it shall be the Contractor's responsibility to ensure the stamped numbers remain visible.
6. Soil plate may be welded to foundation tube. If so, holes in soil plate and foundation tube may be omitted.




Barry, Ed
Jul 14 2015 7:12 AM


**BEAM GUARDRAIL
POSTS AND BLOCKS
STANDARD PLAN C-1b**

SHEET 1 OF 2 SHEETS

APPROVED FOR PUBLICATION
Carpenter, Jeff
Jul 14 2015 11:29 AM
STATE DESIGN ENGINEER

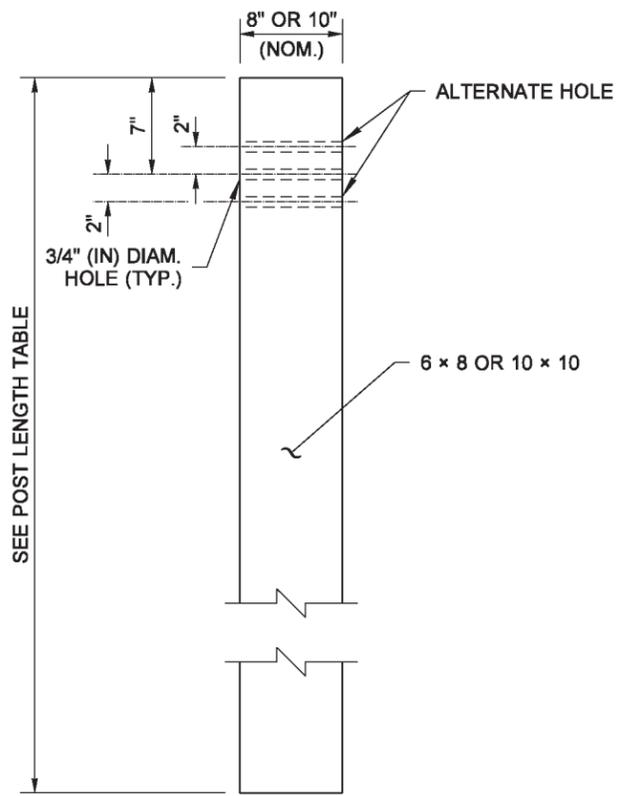


W-BEAM

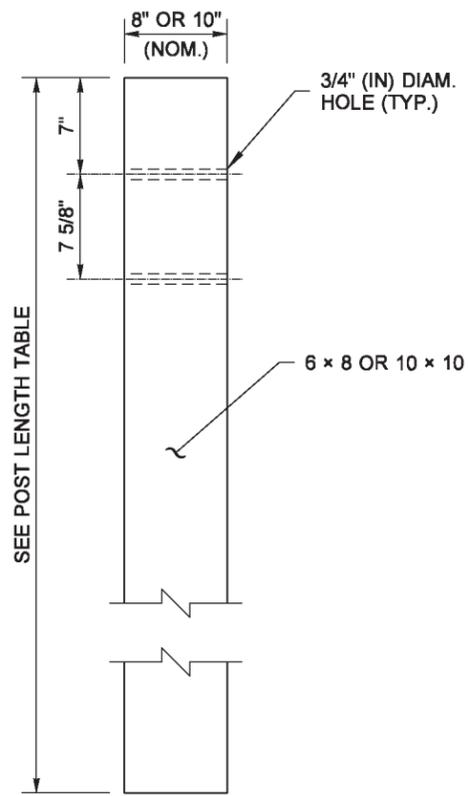


THRIE BEAM

WOOD POST

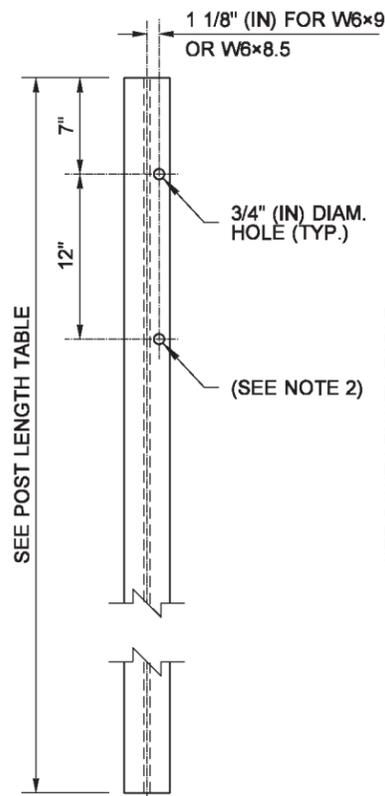


W-BEAM

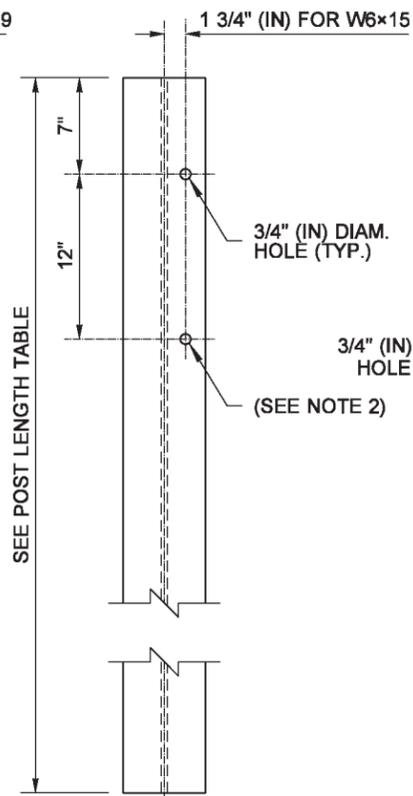


THRIE BEAM

STEEL POST
(SEE NOTES 3 AND 4)

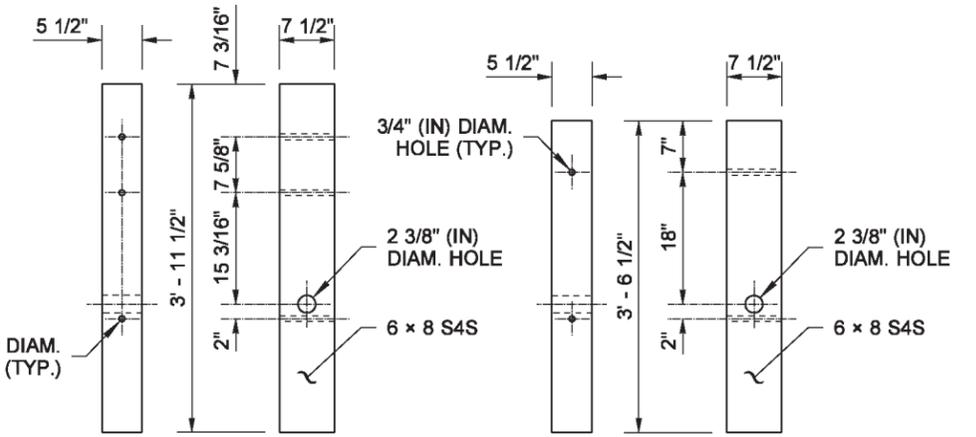

THRIE BEAM
W-BEAM
WOOD BREAKAWAY POST

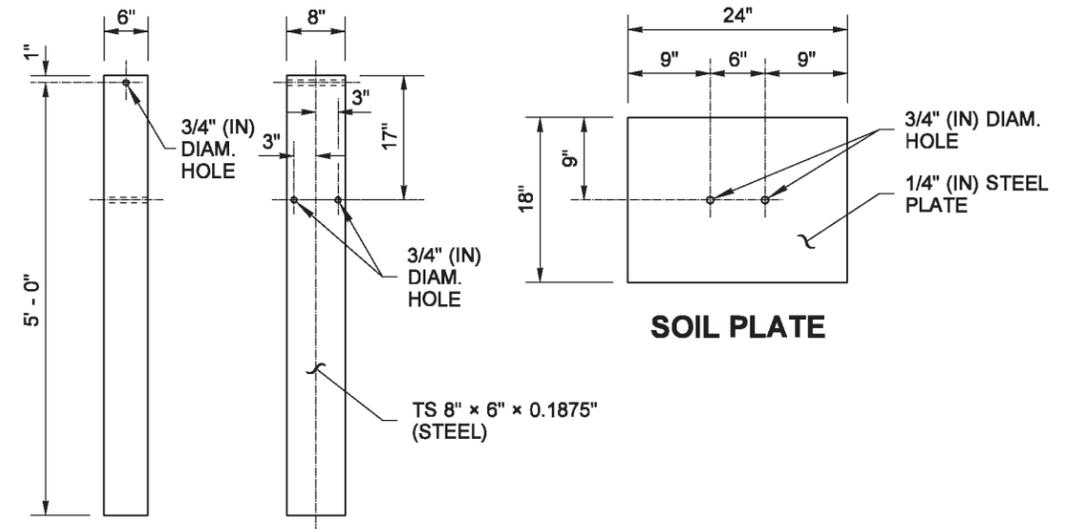

FOUNDATION TUBE



Barry, Ed
Jul 14 2015 7:12 AM

BEAM GUARDRAIL
POSTS AND BLOCKS

STANDARD PLAN C-1b

SHEET 2 OF 2 SHEETS

APPROVED FOR PUBLICATION,
Carpenter, Jeff
Jul 14 2015 11:29 AM

STATE DESIGN ENGINEER




DRAWN BY: FERN LIDDELL


POST LENGTH TABLE	
GUARDRAIL TYPE	LENGTH
1 through 4 & 31	6' - 0"
10 or 11	6' - 6"

POST	A	B
W6 x 9	6"*	4 1/4"
W6 x 15	8"*	6 1/4"
W6 x 8.5	8"*	6 1/4"


* NOMINAL (NOM.)

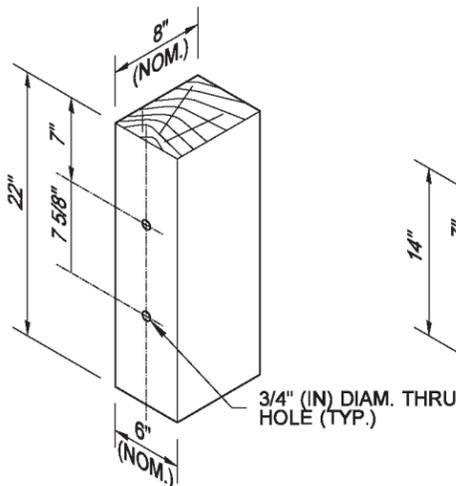


THRIE BEAM WOOD BLOCK
FOR WOOD POST

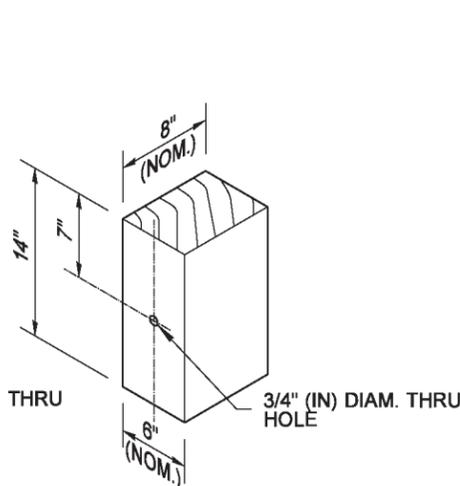


W-BEAM WOOD BLOCK
FOR WOOD POST

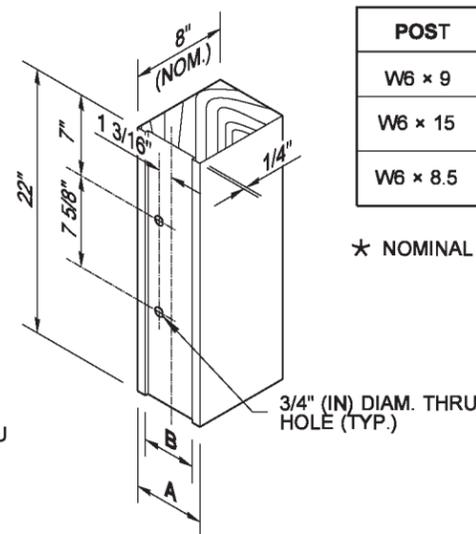

THRIE BEAM WOOD BLOCK
FOR STEEL POST

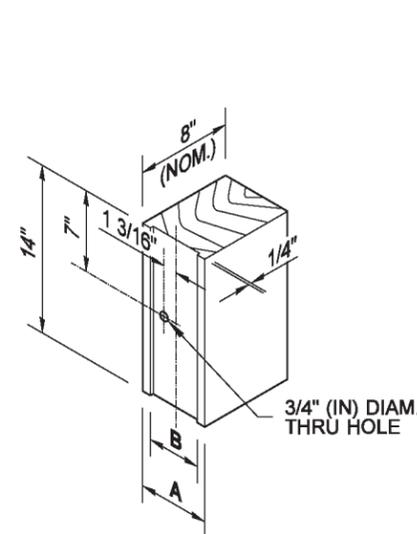




W-BEAM WOOD BLOCK
FOR STEEL POST

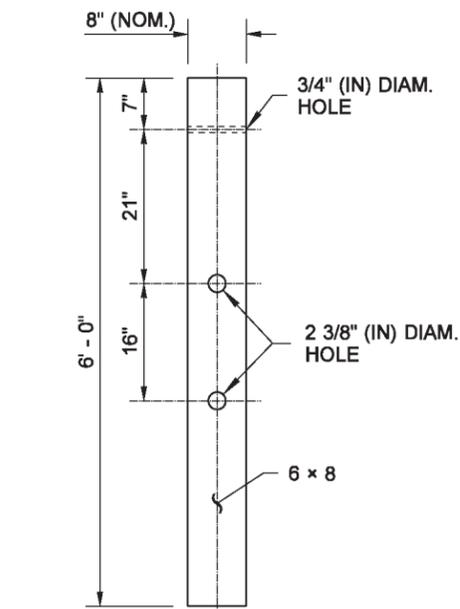

CONTROLLED RELEASING
TERMINAL (CRT) POST

NOTES

1. For post details see Standard Plan, "Beam Guardrail Posts and Blocks".

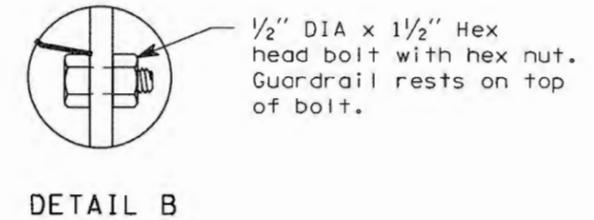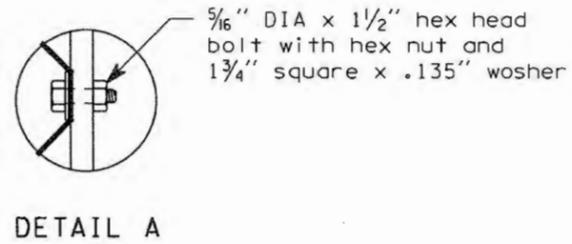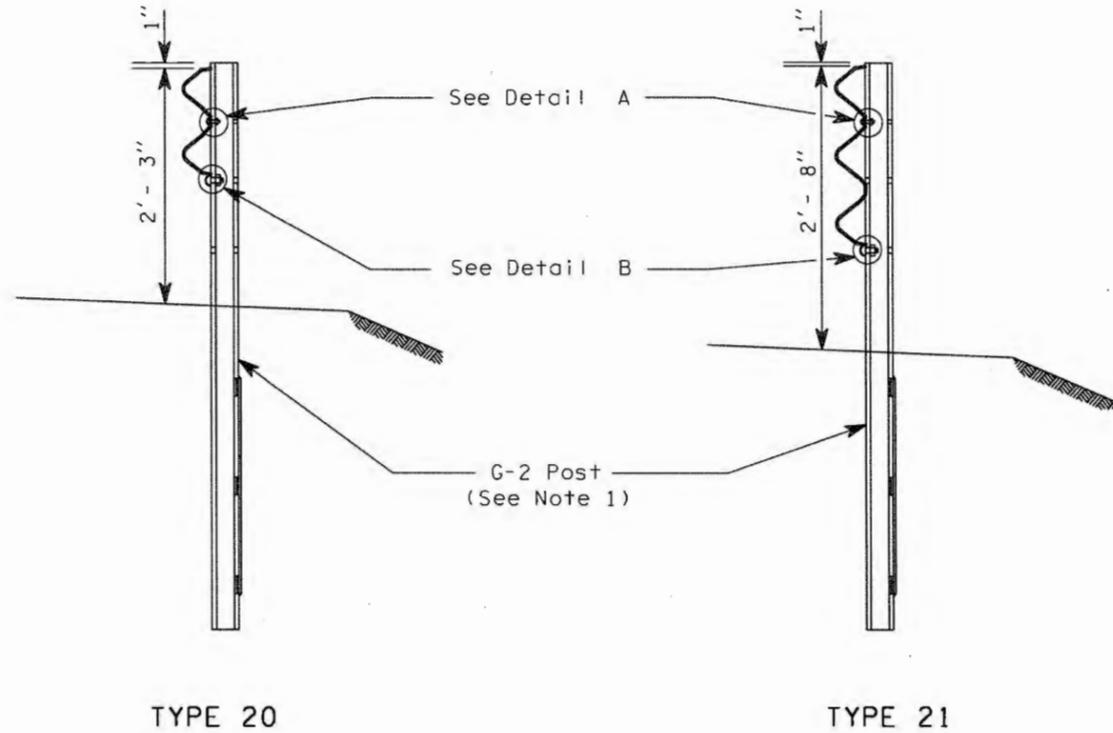

BEAM GUARDRAIL




EXPIRES MAY 3, 1998

STANDARD PLAN C-1c

APPROVED FOR PUBLICATION

[Signature] 5/2/97
STATE DESIGN ENGINEER DATE


WASHINGTON STATE DEPARTMENT OF TRANSPORTATION
OLYMPIA, WASHINGTON

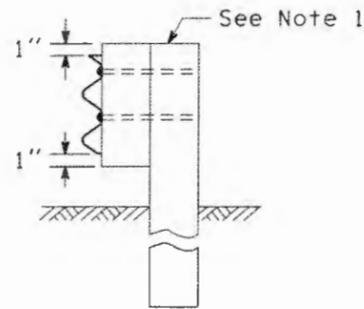

INTERMEDIATE GUARDRAIL
POST CONNECTION DETAILS
(Type A shown)


NOTES

1. For wood posts, saw top of post and block to 1" above thrie beam guardrail reducer section. For steel posts, drive post down to 1" maximum above the thrie beam guardrail reducer section.

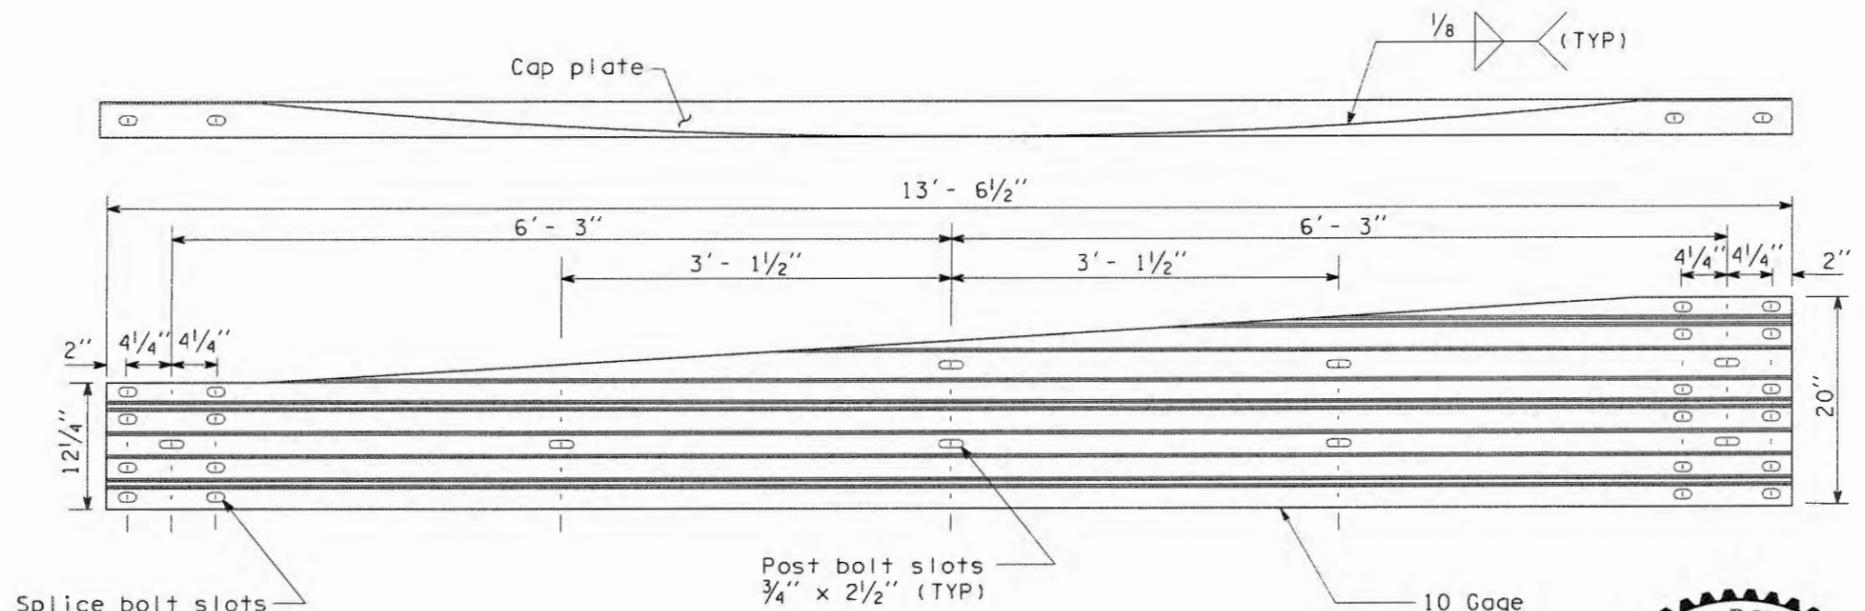

THRIE BEAM GUARDRAIL REDUCER SECTION
TYPE A

(Left section shown, right section reversed)

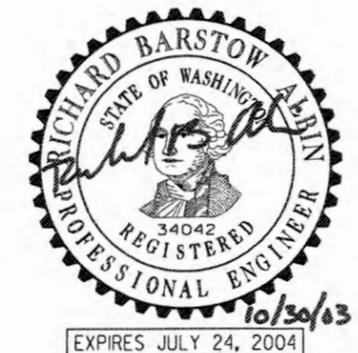


THRIE BEAM GUARDRAIL
REDUCER SECTION

STANDARD PLAN C-1d

SHEET 1 OF 1 SHEET



APPROVED FOR PUBLICATION

David Peterson 10.31.03
STATE DESIGN ENGINEER DATE
Washington State Department of Transportation

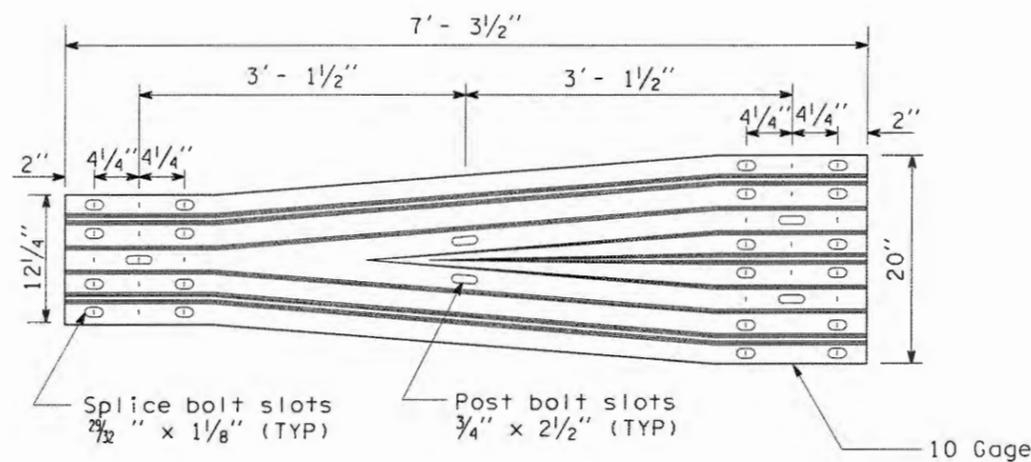

THRIE BEAM GUARDRAIL REDUCER SECTION
TYPE B

DATE	REVISION	BY
09/2003	ADDED 10 GAGE STEEL DESIGNATION; REV. NOTE 1	RG

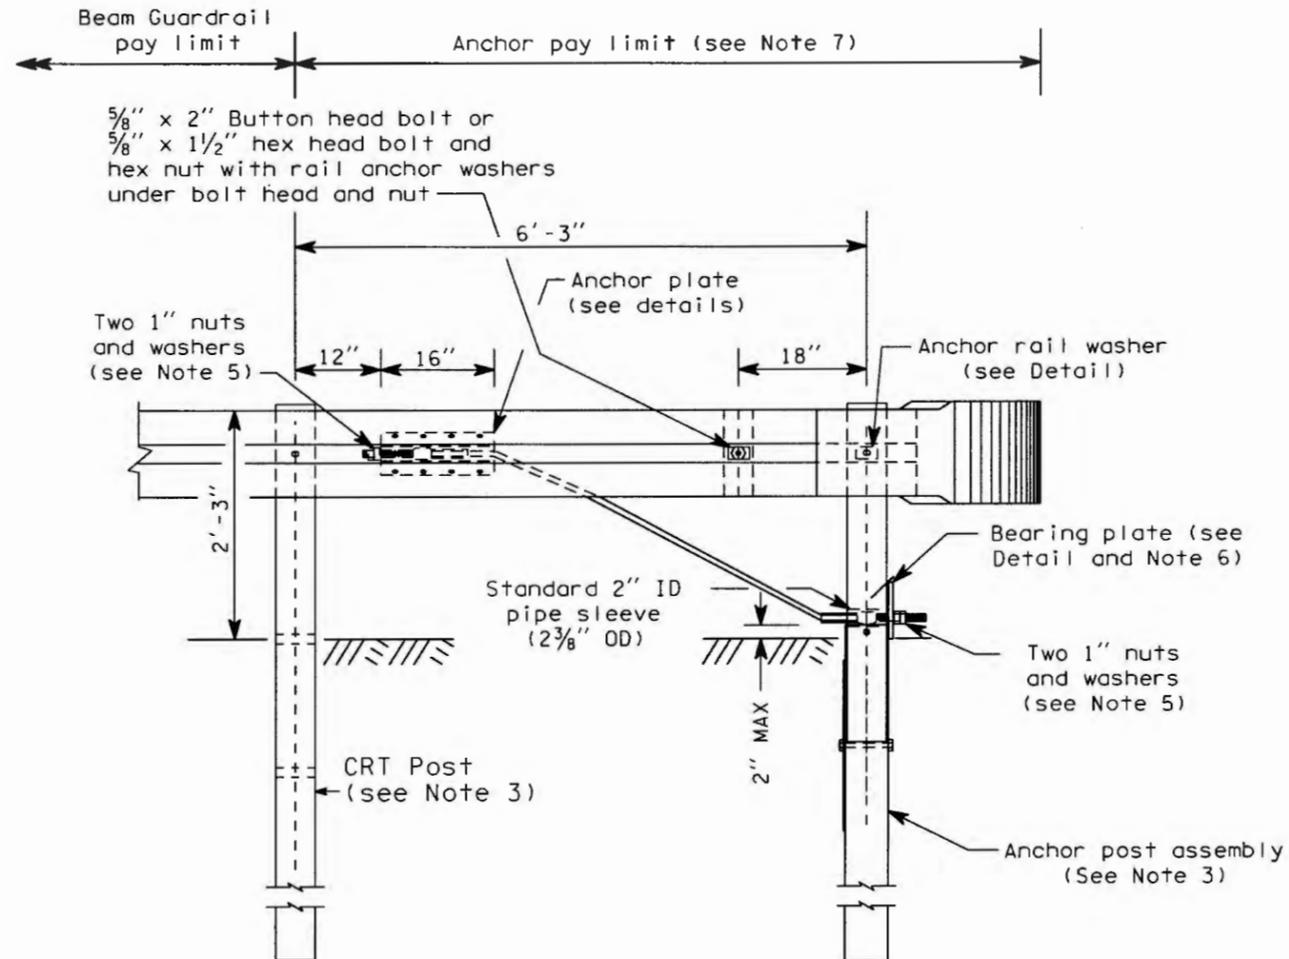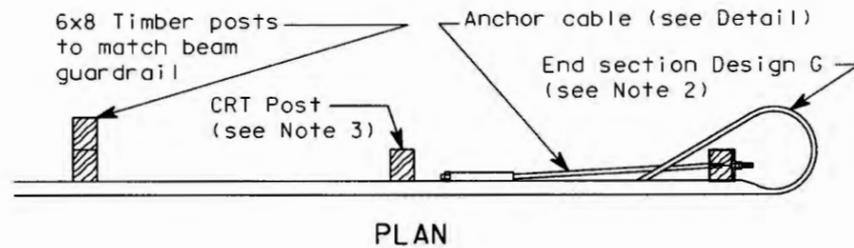

TYPE 1 ANCHOR

NOTES

1. Anchor plate may be constructed from 1/4" plates welded to equal strength and dimensions as shown.
2. For end section details see Standard Plan "Beam Guardrail End Sections".
3. For post details, see Standard Plan "Beam Guardrail Posts and Blocks".
4. Eight 5/8" x 1 1/2" machine bolts with hex nut and washer. Place washer on face side of rail.
5. Outside nut shall be torqued against inside nut a minimum of 100 ft-lbs.
6. Toenail bearing plate with 10d nail at corners to prevent turning.
7. Anchor pay limit does not apply when anchor is included in a Beam Guardrail Terminal.

BEAM GUARDRAIL ANCHOR
TYPE 1



EXPIRES MAY 3, 1998

STANDARD PLAN C-6

APPROVED FOR PUBLICATION

[Signature] 5/20/97
STATE DESIGN ENGINEER DATE

WASHINGTON STATE DEPARTMENT OF TRANSPORTATION
OLYMPIA, WASHINGTON

Sheet 1 of 2 Sheets